



3G系列三螺杆泵 Type 3G Screw pumps



型号说明 Model code



结构特点 Feature

螺杆泵被输送液体在泵内作连续、匀速直线运动，无搅拌，脉动小，故流量、压力稳定，工作平稳，振动、噪音小。

螺杆泵具有较高自吸能力，不需要底阀或抽真空的附属设备。

主动螺杆由电动机驱动，从动螺杆由液体压力驱动，螺杆之间，螺杆与泵套之间皆有油膜保护，泵的机械摩擦小，故泵效率高，寿命长。

泵有单吸、双吸，卧式、立式，为保护泵、电机和管路系统，泵带有安全阀。

Liquid is delivered in axial direction continuously without agitation, and pulsation, so screw pump has constant capacity and pressure, smooth running, small vibration and low noise.

Screw pump has a very high suction capability. It needn't bottom valve and other equipments.

The drive screw is driven by motor and the idler screw is driven by the pressured liquid, between the drive screw and idler screws, screw set and insert an oil film is formed, so the mechanical friction is minimized and a longer life is ensured.

Screw pump has single suction、double suction and horizontal installation、vertical installation pump. In order to ensure the safe working of pump, motor, piping system, screw pump is equipped with safety valves.

适用范围 Using range

三螺杆泵适于输送不含固体颗粒、无腐蚀性、具有润滑性油类和类似油的润滑性液体，粘度为1.2-100°E(3-760mm²/s)，温度≤150℃。流量范围0.2-400m³/h，工作压力0-4MPa。

The three spindle scew pump is suitable to carry various kinds of non-corrosive oil without contents of solid grains and liquids similar to lubricating oils, the viscosity of mediums is from 1.2 to 100°E(from 3 to 760mm²/s),the temperature is equal to or less than 150℃.

The flow range is from 0.2 to 400 m³/h, the working pressure is from 0 to 16MPa.

技术性能表 Table of Technic Performance

型号 Model	转速 r/min	压力 MPa	运动粘度 mm ² /s (°E)													
			6(1.5)		20(3)		40(5)		75(10)		150(20)		380(50)		760(100)	
			流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw
3G25*2-46	1450	0.6	0.76	0.23	0.85	0.23	0.89	0.23	0.92	0.25	0.93	0.29	0.94	0.35	0.96	0.45
		1.0	0.68	0.35	0.77	0.35	0.81	0.35	0.84	0.39	0.85	0.45	0.86	0.55	0.88	0.69
		1.6	0.59	0.54	0.68	0.54	0.72	0.54	0.75	0.60	0.76	0.68	0.77	0.85	0.79	1.07
	2900	0.6	1.96	0.53	2.05	0.53	2.09	0.53	2.12	0.59	2.13	0.67	2.14	0.83	2.16	1.05
		1.0	1.88	0.77	1.97	0.77	2.01	0.77	2.04	0.86	2.05	0.98	2.06	1.20	2.08	1.53
		1.6	1.79	1.14	1.88	1.14	1.92	1.14	1.95	1.27	1.96	1.45	1.97	1.78	1.99	2.26
3G25*3-46	1450	1.0	0.68	0.37	0.77	0.37	0.81	0.37	0.84	0.41	0.85	0.47	0.86	0.57	0.88	0.73
		1.5	0.60	0.52	0.69	0.52	0.73	0.52	0.76	0.58	0.77	0.66	0.78	0.81	0.80	1.03
		2.5	0.47	0.83	0.56	0.83	0.60	0.83	0.63	0.92	0.64	1.05	0.65	1.30	0.67	1.64
	2900	1.0	1.88	0.83	1.97	0.83	2.01	0.83	2.04	0.92	2.05	1.05	2.06	1.30	2.08	1.64
		1.5	1.80	1.13	1.89	1.13	1.93	1.13	1.96	1.26	1.97	1.44	1.98	1.76	2.00	2.24
		2.5	1.67	1.75	1.76	1.75	1.80	1.75	1.83	1.94	1.84	2.21	1.86	2.70	1.87	3.45
3G25*4-46	1450	1.0	0.80	0.39	0.89	0.39	0.93	0.39	0.96	0.43	0.97	0.49	0.98	0.60	1.00	0.77
		2.5	0.66	0.85	0.75	0.85	0.79	0.85	0.82	0.94	0.83	1.07	0.84	1.32	0.86	1.67
		4.0	0.56	1.30	0.65	1.30	0.69	1.30	0.72	1.45	0.73	1.65	0.74	2.00	0.76	2.58
	2900	1.0	2.00	0.90	2.09	0.90	2.13	0.90	2.16	1.01	2.17	1.15	2.18	1.40	2.20	1.80
		2.5	1.86	1.83	1.95	1.83	1.99	1.83	2.02	2.03	2.03	2.30	2.04	2.80	2.08	3.60
		4.0	1.73	2.70	1.85	2.70	1.89	2.70	1.92	3.04	1.93	3.46	1.94	4.26	1.96	5.40
3G25*6-46	1450	4.0	0.56	1.33	0.65	1.33	0.69	1.33	0.72	1.48	0.73	1.69	0.74	2.07	0.76	2.63
		5.0	0.50	1.64	0.59	1.64	0.63	1.64	0.66	1.82	0.67	2.08	0.69	2.55	0.71	3.24
		6.3	0.44	2.04	0.53	2.04	0.57	2.04	0.60	2.27	0.61	2.59	0.62	3.18	0.64	4.05
	2900	4.0	1.76	2.86	1.85	2.86	1.89	2.86	1.92	3.18	1.93	3.63	1.94	4.45	1.96	5.66
		5.0	1.67	3.47	1.79	3.47	1.83	3.47	1.86	3.86	1.87	4.40	1.88	5.40	1.89	6.87
		6.3	1.64	4.26	1.73	4.26	1.77	4.26	1.80	4.73	1.81	5.39	1.82	6.62	1.83	8.42
3G25*8-46	1450	6.0	0.51	1.97	0.60	1.97	0.64	1.97	0.67	2.19	0.68	2.50	0.69	3.07	0.71	3.90
		8.0	0.43	2.57	0.52	2.57	0.56	2.57	0.59	2.86	0.60	3.26	0.61	4.00	0.62	5.09
		10	0.36	3.19	0.45	3.19	0.49	3.19	0.52	3.54	0.53	4.04	0.54	4.96	0.55	6.30
	2900	6.0	1.71	4.19	1.80	4.19	1.84	4.19	1.87	4.65	1.88	5.30	1.89	6.50	1.91	8.28
		8.0	1.63	5.39	1.72	5.39	1.76	5.39	1.79	5.99	1.80	6.83	1.81	8.39	1.82	10.70
		10	1.56	6.60	1.65	6.60	1.69	6.60	1.72	7.33	1.73	8.36	1.74	10.26	1.75	13.05



技术性能表 Table of Technic Performance

型号 Model	转速 r/min	压力 MPa	运动粘度 mm ² /s (°E)													
			6(1.5)		20(3)		40(5)		75(10)		150(20)		380(50)		760(100)	
			流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw
3G32*2-46	1450	0.6	1.89	0.49	2.07	0.49	2.11	0.49	2.14	0.54	2.15	0.62	2.16	0.76	2.18	0.96
		1.0	1.86	0.75	1.95	0.75	1.99	0.75	2.02	0.83	2.03	0.95	2.04	1.16	2.06	1.48
		1.6	1.73	1.14	1.82	1.14	1.86	1.14	1.89	1.27	1.90	1.45	1.91	1.78	1.93	2.26
	2900	0.6	4.51	1.13	4.60	1.13	4.64	1.13	4.67	1.25	4.68	1.43	4.69	1.75	4.70	2.23
		1.0	4.39	1.64	4.48	1.64	4.52	1.64	4.55	1.82	4.56	2.08	4.57	2.55	4.59	3.24
		1.6	4.26	2.40	4.35	2.40	4.39	2.40	4.42	2.68	4.43	3.06	4.44	3.75	4.46	4.77
3G32*3-46	1450	1.0	1.86	0.77	1.95	0.77	1.99	0.77	2.02	0.86	2.03	0.98	2.04	1.20	2.06	1.53
		1.5	1.75	1.10	1.84	1.10	1.88	1.10	1.91	1.22	1.92	1.39	1.93	1.71	1.95	2.17
		2.5	1.57	1.76	1.66	1.76	1.70	1.76	1.73	1.95	1.74	2.22	1.75	2.73	1.77	3.47
	2900	1.0	4.39	1.76	4.48	1.76	4.52	1.76	4.55	1.95	4.56	2.22	4.57	2.73	4.59	3.47
		1.5	4.29	2.40	4.38	2.40	4.41	2.40	4.44	2.66	4.45	3.03	4.46	3.72	4.48	4.73
		2.5	4.10	3.68	4.19	3.68	4.23	3.68	4.26	4.09	4.27	4.66	4.28	5.73	4.30	7.28
3G32*4-46	1450	1.0	1.98	0.81	2.07	0.81	2.11	0.81	2.14	0.90	2.15	1.03	2.16	1.26	2.18	1.60
		2.5	1.75	1.78	1.84	1.78	1.88	1.78	1.91	1.98	1.92	2.26	1.93	2.77	1.95	3.52
		4.0	1.58	2.76	1.67	2.76	1.71	2.76	1.74	3.07	1.75	3.50	1.76	4.30	1.78	5.46
	2900	1.0	4.51	1.93	4.60	1.93	4.64	1.93	4.67	2.14	4.68	2.44	4.69	3.00	4.71	3.80
		2.5	4.28	3.84	4.37	3.84	4.41	3.84	4.44	4.27	4.45	4.87	4.46	5.98	4.48	7.60
		4.0	4.11	5.77	4.20	5.77	4.24	5.77	4.27	6.41	4.28	7.31	4.29	8.97	4.31	11.40
3G32*6-46	1450	4.0	1.58	2.82	1.67	2.82	1.71	2.82	1.74	3.13	1.75	3.57	1.76	4.38	1.78	5.57
		5.0	1.49	3.47	1.58	3.47	1.62	3.47	1.65	3.85	1.66	4.39	1.67	5.39	1.69	6.85
		6.3	1.38	4.30	1.47	4.30	1.51	4.30	1.54	4.78	1.55	5.45	1.56	6.70	1.58	8.50
	2900	4.0	4.11	6.05	4.20	6.05	4.24	6.05	4.27	6.72	4.28	7.66	4.29	9.41	4.31	12.00
		5.0	4.02	7.33	4.11	7.33	4.15	7.33	4.18	8.14	4.19	9.28	4.20	11.40	4.22	14.50
		6.3	3.91	8.97	4.00	8.97	4.04	8.97	4.07	9.97	4.08	11.37	4.09	14.00	4.11	17.75
3G32*8-46	1450	6.0	1.58	4.15	1.67	4.15	1.71	4.15	1.74	4.61	1.75	5.26	1.76	6.45	1.78	8.21
		8.0	1.46	5.43	1.55	5.43	1.59	5.43	1.62	6.04	1.63	6.89	1.64	8.46	1.66	10.75
		10	1.35	6.72	1.44	6.72	1.48	6.72	1.51	7.47	1.52	8.52	1.53	10.46	1.55	13.30
	2900	6.0	4.11	8.82	4.20	8.82	4.24	8.82	4.27	9.80	4.28	11.20	4.29	13.72	4.30	17.45
		8.0	3.99	11.34	4.08	11.34	4.12	11.34	4.15	12.60	4.16	14.36	4.17	17.64	4.19	22.43
		10	3.88	13.95	3.97	13.95	4.01	13.95	4.04	15.50	4.05	17.67	4.06	21.70	4.08	27.60

技术性能表 Table of Technic Performance

型号 Model	转速 r/min	压力 MPa	运动粘度 mm ² /s (°E)													
			6(1.5)		20(3)		40(5)		75(10)		150(20)		380(50)		760(100)	
			流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw
3G36*2-46	1450	0.6	2.93	0.69	3.05	0.69	3.09	0.69	3.13	0.77	3.15	0.88	3.18	1.08	3.20	1.37
		1.0	2.78	1.07	2.90	1.07	2.94	1.07	2.98	1.19	3.00	1.36	3.03	1.67	3.05	2.12
		1.6	2.61	1.64	2.73	1.64	2.77	1.64	2.81	1.82	2.83	2.07	2.86	2.55	2.88	3.24
	2900	0.6	6.56	1.61	6.68	1.61	6.72	1.61	6.76	1.79	6.78	2.04	6.81	2.51	6.83	3.19
		1.0	6.40	2.35	6.53	2.35	6.57	2.35	6.61	2.61	6.63	2.98	6.66	3.65	6.68	4.65
		1.6	6.24	3.47	6.36	3.47	6.40	3.47	6.44	3.85	6.46	4.39	6.49	5.39	6.51	6.85
3G36*3-46	1450	1.0	2.78	1.11	2.90	1.11	2.94	1.11	2.98	1.23	3.00	1.40	3.03	1.72	3.05	2.19
		1.5	2.63	1.58	2.75	1.58	2.79	1.58	2.83	1.75	2.85	2.00	2.88	2.45	2.90	3.12
		2.5	2.40	2.51	2.52	2.51	2.56	2.51	2.60	2.79	2.62	3.18	2.65	3.91	2.67	4.97
	2900	1.0	6.81	2.51	6.69	2.51	6.65	2.51	6.61	2.79	6.63	3.18	6.66	3.91	6.68	4.97
		1.5	6.26	3.43	6.38	3.43	6.42	3.43	6.46	3.81	6.48	4.34	6.51	5.33	6.53	6.78
		2.5	6.18	5.27	6.31	5.27	6.27	5.27	6.23	5.86	6.25	6.68	6.28	8.20	6.30	10.43
3G36*4-46	1450	1.0	2.94	1.16	3.06	1.16	3.10	1.16	3.14	1.29	3.16	1.47	3.19	1.81	3.21	2.30
		2.5	2.65	2.56	2.77	2.56	2.81	2.56	2.85	2.84	2.87	3.24	2.90	3.98	2.92	5.06
		4.0	2.44	3.96	2.56	3.96	2.60	3.96	2.64	4.40	2.66	5.02	2.69	6.16	2.71	7.83
	2900	1.0	6.56	2.75	6.68	2.75	6.72	2.75	6.76	3.06	6.78	3.49	6.81	4.28	6.83	5.45
		2.5	6.28	5.51	6.40	5.51	6.44	5.51	6.48	6.12	6.50	6.98	6.53	8.57	6.55	10.89
		4.0	6.07	8.26	6.19	8.26	6.23	8.26	6.27	9.18	6.29	10.47	6.32	12.85	6.31	16.34
3G36*6-46	1450	4.0	2.44	4.03	2.56	4.03	2.60	4.03	2.64	4.48	2.66	5.11	2.69	6.27	2.71	7.97
		5.0	2.33	4.96	2.45	4.96	2.49	4.96	2.53	5.51	2.55	6.28	2.58	7.71	2.60	9.81
		6.3	2.19	6.17	2.31	6.17	2.35	6.17	2.39	6.85	2.41	7.81	2.44	9.59	2.46	12.19
	2900	4.0	6.07	8.64	6.19	8.64	6.23	8.64	6.27	9.60	6.29	10.94	6.32	13.44	6.34	17.10
		5.0	5.96	10.53	6.08	10.53	6.12	10.53	6.16	11.70	6.18	13.34	6.21	16.38	6.23	20.83
		6.3	5.82	12.87	5.94	12.87	5.98	12.87	6.02	14.30	6.04	16.30	6.07	20.00	6.09	25.45
3G36*8-46	1450	6.0	2.54	5.94	2.66	5.94	2.71	5.94	2.67	6.60	2.69	7.52	2.72	9.24	2.74	11.75
		8.0	2.32	7.78	2.44	7.78	2.48	7.78	2.52	8.64	2.54	9.85	2.57	12.10	2.59	15.38
		10	2.19	9.63	2.31	9.63	2.35	9.63	2.39	10.70	2.41	12.20	2.44	14.98	2.46	19.00
	2900	6.0	6.10	12.60	6.22	12.60	6.26	12.60	6.30	14.00	6.32	15.96	6.35	19.60	6.37	24.90
		8.0	5.95	16.29	6.07	16.29	6.11	16.29	6.15	18.10	6.17	20.63	6.20	25.34	6.22	32.22
		10	5.82	19.98	5.94	19.98	5.98	19.98	6.02	22.20	6.04	25.31	6.07	31.08	6.09	39.52



技术性能表 Table of Technic Performance

型号 Model	转速 r/min	压力 MPa	运动粘度 mm ² /s (°E)													
			6(1.5)		20(3)		40(5)		75(10)		150(20)		380(50)		760(100)	
			流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw
3G40*2-46	1450	0.6	3.99	0.95	4.20	0.95	4.29	0.95	4.35	1.05	4.39	1.20	4.42	1.47	4.44	1.88
		1.0	3.81	1.47	1.02	1.47	4.11	1.47	4.17	1.63	4.21	1.86	4.24	2.28	4.26	2.90
		1.6	3.59	2.24	3.80	2.24	3.89	2.24	3.95	2.49	3.99	2.84	4.02	3.49	4.05	4.43
	2900	0.6	8.96	2.20	9.17	2.20	9.26	2.20	9.32	2.45	9.36	2.79	9.39	3.43	9.42	4.36
		1.0	8.78	3.22	8.99	3.22	9.08	3.22	9.14	3.58	9.18	4.08	9.21	5.01	9.24	6.37
		1.6	8.57	4.75	8.78	4.75	8.87	4.75	8.93	5.28	8.97	6.02	9.00	7.39	9.03	9.40
3G40*3-46	1450	1.0	3.81	1.51	4.02	1.51	4.11	1.51	4.17	1.68	4.21	1.92	4.24	2.35	4.27	2.99
		1.5	3.62	2.16	3.83	2.16	3.92	2.16	3.98	2.40	4.02	2.74	4.05	3.36	4.08	4.27
		2.5	3.34	3.45	3.55	3.45	3.64	3.45	3.70	3.83	3.74	4.37	3.77	5.36	3.80	6.82
	2900	1.0	8.78	3.45	8.99	3.45	9.08	3.45	9.14	3.83	9.18	4.37	9.21	5.36	9.24	6.82
		1.5	8.60	4.71	8.81	4.71	8.90	4.71	8.96	5.23	9.00	5.96	9.03	7.32	9.06	9.31
		2.5	8.31	7.24	8.52	7.24	8.61	7.24	8.67	8.04	8.71	9.17	8.74	11.26	8.77	14.31
3G40*4-46	1450	1.0	4.02	1.59	4.23	1.59	4.32	1.59	4.38	1.77	4.42	2.02	4.45	2.48	4.48	3.15
		2.5	3.67	3.51	3.88	3.51	3.97	3.51	4.03	3.90	4.07	4.45	4.10	5.46	4.13	6.94
		4.0	3.42	5.43	3.63	5.43	3.72	5.43	3.78	6.03	3.82	6.87	3.85	8.44	3.88	10.73
	2900	1.0	8.99	3.78	9.20	3.78	9.29	3.78	9.35	4.20	9.39	4.79	9.42	5.88	9.45	7.48
		2.5	8.65	7.55	8.86	7.55	8.95	7.55	9.01	8.39	9.05	9.56	9.08	11.75	9.11	14.93
		4.0	8.39	11.34	8.60	11.34	8.69	11.34	8.75	12.60	8.79	14.36	8.85	17.64	8.85	22.43
3G40*6-46	1450	4.0	3.42	5.54	3.63	5.54	3.72	5.54	3.78	6.15	3.82	7.00	3.85	8.60	3.88	10.95
		5.0	3.27	6.80	3.48	6.80	3.57	6.80	3.63	7.56	3.67	8.62	3.70	10.58	3.73	13.46
		6.3	3.11	8.45	3.32	8.45	3.41	8.45	3.47	9.39	3.51	10.70	3.54	13.15	3.57	16.71
	2900	4.0	8.39	11.88	8.60	11.88	8.69	11.88	8.75	13.20	8.79	15.05	8.82	18.48	8.85	23.50
		5.0	8.24	14.40	8.45	14.40	8.54	14.40	8.60	16.00	8.64	18.24	8.67	22.40	8.70	28.48
		6.3	8.09	17.64	8.30	17.64	8.39	17.64	8.45	19.60	8.49	22.34	8.52	27.44	8.55	34.89
3G40*8-46	1450	6.0	3.46	8.15	3.65	8.15	3.76	8.15	3.82	9.05	3.86	10.32	3.89	12.67	3.92	16.11
		8.0	3.28	10.71	3.49	10.71	3.58	10.71	3.64	11.90	3.68	13.57	3.71	16.66	3.74	21.18
		10	3.12	13.23	3.33	13.23	3.42	13.23	3.48	14.70	3.52	16.76	3.55	20.58	3.58	26.17
	2900	6.0	8.43	17.37	8.64	17.37	8.37	17.37	8.79	19.30	8.83	22.00	8.86	27.02	8.89	34.35
		8.0	8.24	22.32	8.45	22.32	8.54	22.32	8.60	24.80	8.64	28.27	8.67	34.72	8.70	44.14
		10	8.09	27.36	8.30	27.36	8.39	27.36	8.45	30.40	8.49	34.66	8.52	42.56	8.55	54.11



技术性能表 Table of Technic Performance

型号 Model	转速 r/min	压力 MPa	运动粘度 mm ² /s (°E)													
			6(1.5)		20(3)		40(5)		75(10)		150(20)		380(50)		760(100)	
			流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw
3G45*2-46	1450	0.6	5.94	1.35	6.15	1.35	6.24	1.35	6.30	1.50	6.34	1.71	6.37	2.10	6.40	2.67
		1.0	5.71	2.09	5.92	2.09	6.01	2.09	6.07	2.32	6.11	2.64	6.14	3.25	6.17	4.13
		1.6	5.44	3.20	5.65	3.20	5.74	3.20	5.80	3.55	5.84	4.05	5.87	4.97	5.90	6.32
	2900	0.6	1304	3.15	13.25	3.15	13.34	3.15	13.40	3.50	13.44	3.99	13.47	4.90	13.50	6.23
		1.0	12.84	4.59	13.05	4.59	13.14	4.59	13.20	5.10	13.24	5.81	13.27	7.14	13.30	9.08
		1.6	12.54	6.77	12.75	6.77	12.84	6.77	12.90	7.52	12.94	8.57	12.97	10.53	13.00	13.39
3G45*3-46	1450	1.0	5.71	2.16	5.92	2.16	6.01	2.16	6.07	2.40	6.11	2.74	6.14	3.36	6.17	4.27
		1.5	5.48	3.08	5.69	3.08	5.78	3.08	5.84	3.42	5.88	3.90	5.91	4.79	5.94	6.09
		2.5	5.12	4.91	5.33	4.91	5.42	4.91	5.48	5.45	5.52	6.21	5.55	7.63	5.58	9.70
	2900	1.0	12.84	4.91	13.05	4.91	13.14	4.91	13.20	5.45	13.24	6.21	13.27	7.63	13.30	9.70
		1.5	12.54	6.71	12.75	6.71	12.84	6.71	12.90	7.46	12.94	8.50	12.97	10.44	13.00	13.28
		2.5	12.24	10.35	12.45	10.35	12.54	10.35	12.60	11.50	12.64	13.11	12.67	16.10	12.70	20.47
3G45*4-46	1450	1.0	6.01	2.27	6.22	2.27	6.31	2.27	6.37	2.52	6.41	2.87	6.44	3.53	6.47	4.49
		2.5	5.59	5.00	5.80	5.00	5.89	5.00	5.95	5.56	5.99	6.34	6.02	7.78	6.04	9.9.
		4.0	5.29	7.73	5.50	7.73	5.59	7.73	5.65	8.59	5.69	9.79	5.72	12.03	5.75	15.29
	2900	1.0	13.14	5.38	13.35	5.38	13.44	5.38	13.50	5.98	13.54	6.82	13.57	8.37	13.60	10.64
		2.5	12.64	10.80	12.85	10.80	12.94	10.80	13.00	12.00	13.04	13.68	13.07	16.80	13.10	21.36
		4.0	12.34	16.20	12.55	16.20	12.64	16.20	12.70	18.00	12.74	20.52	12.77	25.20	12.80	32.04
3G45*6-46	1450	4.0	5.29	7.90	5.50	7.90	5.59	7.90	5.65	8.76	5.69	10.01	5.72	12.29	5.75	15.63
		5.0	5.12	9.72	5.33	9.72	5.42	9.72	5.48	10.80	5.52	12.31	5.56	15.12	5.58	19.22
		6.3	4.92	12.06	5.13	12.06	5.22	12.06	5.28	13.40	5.32	15.28	5.35	18.76	5.38	23.85
	2900	4.0	12.34	16.92	12.55	16.92	12.64	16.92	12.70	18.80	12.74	21.43	12.77	26.32	12.80	33.46
		5.0	12.24	20.52	12.45	20.52	12.54	20.52	12.60	22.80	12.64	25.99	12.67	31.92	12.70	40.58
		6.3	12.04	25.20	12.25	25.20	12.34	25.20	12.40	28.00	12.44	31.92	12.47	39.20	12.50	49.84
3G45*8-46	1450	6.0	5.26	11.61	5.47	11.61	5.56	11.61	5.62	12.90	5.66	14.71	5.69	18.06	5.72	22.96
		8.0	5.03	15.21	5.24	15.21	5.33	15.21	5.39	16.90	5.43	19.27	5.46	23.66	5.49	30.08
		10	4.83	18.81	5.04	18.81	5.13	18.81	5.19	20.90	5.23	23.83	5.26	29.26	5.29	37.20
	2900	6.0	12.34	24.66	12.55	24.66	12.64	24.66	12.70	27.40	12.74	31.24	12.77	38.36	12.80	48.77
		8.0	12.14	31.86	12.35	31.86	12.44	31.86	12.50	35.40	12.54	40.36	12.57	49.56	12.60	63.01
		10	11.94	38.97	12.15	38.97	12.24	38.97	12.30	43.30	12.34	49.36	12.37	60.62	12.40	77.07
3G45*12-46	1450	10	5.21	19.08	5.42	19.08	5.51	19.08	5.57	21.20	5.61	24.17	5.64	29.68	5.67	37.74
		14	4.93	26.19	5.14	26.19	5.23	26.19	5.29	29.10	5.33	33.17	5.36	40.74	5.39	51.80
		16	4.81	29.79	5.02	29.79	5.11	29.79	5.17	33.10	5.21	37.73	5.24	46.34	5.27	58.92
	2900	10	12.34	40.23	12.55	40.23	12.64	40.23	12.70	44.70	12.74	50.96	12.77	62.58	12.80	79.57
		14	12.04	54.45	12.25	54.45	12.34	54.45	12.40	60.50	12.44	68.397	12.47	84.70	12.50	107.7
		16	11.94	61.56	12.15	61.56	12.24	61.56	12.30	68.40	12.34	77.98	12.37	95.76	12.40	121.8



技术性能表 Table of Technic Performance

型号 Model	转速 r/min	压力 MPa	运动粘度 mm ² /s (°E)													
			6(1.5)		20(3)		40(5)		75(10)		150(20)		380(50)		760(100)	
			流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw
3G50*2-46	1450	0.6	8.41	1.85	8.62	1.85	8.71	1.85	8.77	2.06	8.81	2.35	8.84	2.88	8.87	3.67
		1.0	8.13	2.87	8.34	2.87	8.43	2.87	8.49	3.19	8.53	3.64	8.56	4.47	8.58	5.68
		1.6	7.81	4.38	8.02	4.38	8.11	4.38	8.17	4.87	8.21	5.55	8.24	6.82	8.27	8.367
	2900	0.6	18.14	4.32	18.35	4.32	18.44	4.32	18.50	4.80	18.54	5.47	18.57	6.72	18.60	8.54
		1.0	17.84	6.30	18.05	6.30	18.14	6.30	18.20	7.00	18.24	7.98	18.27	9.80	18.30	12.46
		1.6	17.54	9.27	17.75	9.27	17.84	9.27	17.90	10.30	17.94	11.74	17.97	14.42	18.00	18.33
3G50*3-46	1450	1.0	8.13	2.96	8.34	2.96	8.43	2.96	8.49	3.29	8.53	3.75	8.56	4.61	8.59	5.86
		1.5	7.85	4.22	8.06	4.22	8.15	4.22	8.21	4.69	8.25	5.35	8.28	6.57	8.31	8.35
		2.5	7.41	6.73	7.62	6.73	7.71	6.73	7.77	7.48	7.81	8.53	7.84	10.47	7.87	13.31
	2900	1.0	17.84	6.73	18.05	6.73	18.14	6.73	18.20	7.48	18.24	5.53	18.27	10.47	18.30	13.31
		1.5	17.54	9.18	17.75	9.18	17.84	9.18	17.90	10.20	17.94	11.63	17.97	14.28	18.00	18.16
		2.5	17.14	14.13	17.35	14.13	17.44	14.13	17.50	15.70	17.54	17.90	17.57	21.98	17.60	27.95
3G50*4-46	1450	1.0	8.47	3.11	8.68	3.11	8.77	3.11	8.83	3.46	8.87	3.94	8.90	4.84	8.93	6.16
		2.5	7.94	6.86	8.15	6.86	8.24	6.86	8.30	7.62	8.34	8.69	8.37	10.67	8.40	13.56
		4.0	7.57	10.62	7.78	10.62	7.87	10.62	7.93	11.80	7.97	13.45	8.00	16.52	8.03	21.00
	2900	1.0	18.24	7.38	18.45	7.38	18.54	7.38	18.60	8.20	18.64	9.35	18.67	11.48	18.70	14.60
		2.5	17.64	14.76	17.85	14.76	17.94	14.76	18.00	16.40	18.04	18.70	18.07	22.96	18.10	29.19
		4.0	17.34	22.14	17.55	22.14	17.64	22.14	17.7	24.60	17.74	28.04	17.77	34.44	17.80	43.79
3G50*6-46	1450	4.0	7.57	10.8	7.78	10.8	7.87	10.8	7.93	12.00	7.97	13.68	8.00	16.80	8.03	21.36
		5.0	7.36	13.32	7.57	13.32	7.66	13.32	7.72	14.80	7.76	16.87	7.79	20.72	7.82	26.34
		6.3	7.11	16.56	7.32	16.56	7.41	16.56	7.47	18.40	7.51	20.98	7.54	25.76	7.57	32.75
	2900	4.0	17.34	23.22	17.55	23.22	17.64	23.22	17.70	25.80	17.74	29.41	17.77	36.12	17.80	45.92
		5.0	17.04	28.17	17.25	28.17	17.34	28.17	17.40	31.30	17.44	35.68	17.47	43.82	17.50	55.71
		6.3	16.84	34.56	17.05	34.56	17.14	34.56	17.20	38.40	17.24	43.78	17.27	53.76	17.30	68.35
3G50*8-46	1450	6.0	7.72	15.93	7.93	15.93	8.02	15.93	8.08	17.70	8.12	20.18	8.15	24.78	8.18	31.51
		8.0	7.46	20.88	7.67	20.88	7.76	20.88	7.82	23.20	7.86	26.45	7.89	32.48	7.92	41.30
		10	7.24	25.83	7.45	25.83	7.54	25.83	7.60	28.70	7.64	32.72	7.67	40.18	7.70	51.09
	2900	6.0	17.44	33.84	17.65	33.84	17.74	33.84	17.80	37.60	17.84	42.86	17.87	55.64	17.90	66.93
		8.0	17.24	43.65	17.45	43.62	17.54	43.65	17.60	48.50	17.64	55.29	17.67	67.90	17.70	86.33
		10	16.94	53.46	17.15	53.46	17.24	53.46	17.30	59.40	17.34	67.72	17.37	83.16	17.40	105.7
3G50*12-46	1450	10	7.43	26.10	7.64	26.10	7.73	26.10	7.79	29.00	7.83	33.06	7.86	40.60	7.89	51.62
		14	7.07	36.00	7.28	36.00	7.37	36.00	7.43	40.00	7.47	45.60	7.50	56.00	7.53	71.20
		16	6.92	40.86	7.13	40.86	7.22	40.86	7.28	45.40	7.32	51.76	7.35	63.56	7.38	80.81
	2900	10	17.14	55.17	17.35	55.17	17.44	55.17	17.50	61.30	17.54	69.88	17.58	85.82	17.60	116.5
		14	16.84	74.70	17.05	74.70	17.14	74.70	17.20	83.00	17.24	94.62	17.27	116.2	17.30	147.7
		16	16.64	84.42	16.85	84.42	16.94	84.42	17.00	93.80	17.04	106.9	17.07	131.3	17.10	167.0

技术性能表 Table of Technic Performance

型号 Model	转速 r/min	压力 MPa	运动粘度 mm ² /s (°E)													
			6(1.5)		20(3)		40(5)		75(10)		150(20)		380(50)		760(100)	
			流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw
3G55*2-46	1450	0.6	11.34	2.47	11.55	2.47	11.64	2.47	11.70	2.74	11.74	3.12	11.77	3.84	11.80	4.88
		1.0	10.94	3.82	11.15	3.82	11.24	3.82	11.30	4.24	11.34	4.83	11.37	5.94	11.40	7.55
		1.6	10.54	5.84	10.75	5.84	10.84	5.84	10.90	6.49	10.94	7.40	10.97	9.09	11.00	11.55
	2900	0.6	24.24	5.75	24.45	5.75	24.54	5.75	24.60	6.39	24.64	7.28	24.67	8.95	24.70	11.37
		1.0	23.94	8.40	24.15	8.40	24.24	8.40	24.30	9.33	24.34	10.64	24.37	13.06	24.40	16.61
		1.6	23.44	12.33	23.65	12.33	23.74	12.33	23.80	13.70	23.84	15.62	23.87	19.18	23.90	24.39
3G55*3-46	1450	1.0	10.94	3.94	11.15	3.94	11.24	3.94	11.30	4.38	11.34	4.99	11.37	6.13	11.40	7.80
		1.5	10.54	5.62	10.75	5.62	10.84	5.62	10.90	6.24	10.94	7.11	10.97	8.74	11.00	11.11
		2.5	9.94	8.97	10.15	8.97	10.24	8.97	10.30	9.97	10.34	11.37	10.37	13.96	10.40	17.75
	2900	1.0	23.94	8.96	24.15	8.96	24.24	8.96	24.30	9.96	24.34	11.35	24.37	13.94	24.40	17.73
		1.5	23.54	12.24	23.75	12.24	23.84	12.24	23.90	13.60	23.94	15.50	23.97	19.04	24.00	24.20
		2.5	22.94	18.80	23.15	18.80	23.24	18.80	23.30	20.90	23.34	23.83	23.37	29.26	23.40	37.20
3G55*4-46	1450	1.0	11.54	4.15	11.75	4.15	11.84	4.15	11.90	4.61	11.94	5.26	11.97	6.45	12.00	8.20
		2.5	10.84	9.18	11.05	9.18	11.14	9.18	11.20	10.20	11.24	11.63	11.27	14.28	11.30	18.16
		4.0	10.44	14.13	10.65	14.13	10.74	14.13	10.80	15.70	10.84	17.90	10.87	21.98	10.90	27.95
	2900	1.0	24.44	9.81	24.65	9.81	24.74	9.81	24.80	10.90	24.84	12.43	24.87	15.26	24.90	19.40
		2.5	23.84	19.71	24.05	19.71	24.14	19.71	24.20	21.90	24.24	24.97	24.27	30.66	24.30	38.98
		4.0	23.34	29.52	23.55	29.52	23.64	29.52	23.70	32.80	23.74	37.39	23.77	45.92	23.80	58.38
3G55*6-46	1450	4.0	10.44	14.40	10.65	14.40	10.74	14.40	10.80	16.00	10.84	18.24	10.87	22.40	10.90	28.48
		5.0	10.14	17.73	10.35	17.73	10.44	17.73	10.50	19.70	10.54	22.46	10.57	27.58	10.60	35.07
		6.3	9.84	22.05	10.05	22.05	10.14	22.05	10.20	24.50	10.24	27.93	10.27	34.30	10.30	43.61
	2900	4.0	23.34	21.96	23.55	21.96	23.64	21.96	23.70	24.40	23.74	27.82	23.77	34.16	23.80	43.43
		5.0	23.14	37.44	23.35	37.44	23.44	37.44	23.50	41.60	23.54	47.42	23.57	58.24	23.60	74.05
		6.3	22.84	45.99	23.05	45.99	23.14	45.99	23.20	51.10	23.24	58.25	23.27	71.54	23.30	90.96
3G55*8-46	1450	6.0	10.34	21.24	10.55	21.24	10.64	21.24	10.70	23.60	10.74	26.90	10.77	33.04	10.80	42.00
		8.0	9.94	27.81	10.15	27.81	10.24	27.81	10.30	30.90	10.34	35.23	10.37	43.26	10.40	55.00
		10	9.64	34.38	9.85	34.38	9.94	34.38	10.00	38.20	10.04	43.55	10.07	53.48	10.10	68.00
	2900	6.0	23.24	45.10	23.45	45.10	23.54	45.10	23.60	50.10	23.64	57.10	23.67	70.14	23.70	89.18
		8.0	21.94	58.14	23.15	58.14	23.24	58.14	23.30	64.60	23.34	73.64	23.37	90.44	23.40	115.0
		10	22.64	71.20	22.85	71.20	22.94	71.20	23.00	79.10	23.04	90.17	23.07	110.7	23.10	140.8
3G55*12-46	1450	10	10.24	34.83	10.45	34.83	10.54	34.83	10.60	38.70	10.64	44.12	10.67	54.18	10.70	68.89
		14	9.74	47.88	9.95	47.88	10.04	47.88	10.10	53.20	10.14	60.65	10.17	74.48	10.20	94.70
		16	9.59	54.45	9.80	54.45	9.89	54.45	9.95	60.50	9.99	68.97	10.02	84.70	10.05	107.7
	2900	10	23.14	73.44	23.35	73.44	23.44	73.44	23.50	81.60	23.54	93.02	23.57	114.2	23.60	145.2
		14	22.74	99.00	22.95	99.00	23.04	99.00	23.10	110.0	23.14	125.4	23.17	154.0	23.20	195.8
		16	22.54	112.5	22.75	112.5	22.84	112.5	22.90	125.0	22.94	142.5	22.97	175.0	23.00	222.5



技术性能表 Table of Technic Performance

型号 Model	转速 r/min	压力 MPa	运动粘度 mm ² /s (°E)													
			6(1.5)		20(3)		40(5)		75(10)		150(20)		380(50)		760(100)	
			流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw
3G60*2-46	1450	0.6	14.20	3.04	14.80	3.04	14.98	3.04	15.10	3.56	15.16	4.06	15.22	4.98	15.28	6.34
		1.0	13.70	4.96	14.30	4.96	14.48	4.96	14.60	5.51	14.66	6.28	14.72	7.71	14.78	9.81
		1.6	13.10	7.59	13.70	7.59	13.88	7.59	14.00	8.43	14.06	9.61	14.12	11.80	14.18	15.01
	2900	0.6	30.40	7.46	31.30	7.46	31.60	7.46	31.90	8.29	30.02	9.45	32.14	11.61	32.26	14.76
		1.0	29.90	10.89	30.80	10.89	31.10	10.89	31.40	12.10	31.52	13.79	31.64	16.94	31.76	21.54
		1.6	29.30	16.02	30.20	16.02	30.50	16.02	30.80	17.80	30.92	20.29	31.04	24.92	31.16	31.68
3G60*3-46	1450	1.0	13.10	5.12	14.00	5.12	14.30	5.12	14.60	5.69	14.72	6.49	14.84	7.97	14.96	10.13
		1.5	12.60	7.30	13.50	7.30	13.80	7.30	14.10	8.11	14.22	9.25	14.34	11.35	14.46	14.44
		2.5	11.80	11.61	12.70	11.61	13.00	11.61	13.30	12.90	13.42	14.71	13.54	18.06	13.66	22.96
	2900	1.0	29.90	11.61	30.80	11.61	31.10	11.61	31.40	12.90	31.52	14.71	31.64	18.06	31.76	22.96
		1.5	29.40	15.93	30.30	15.93	30.60	15.93	30.90	17.70	31.02	20.18	31.14	24.78	31.26	31.51
		2.5	28.60	24.48	29.50	24.48	29.80	24.48	30.10	27.20	30.22	31.01	30.34	38.08	30.46	48.42
3G60*4-46	1450	1.0	14.00	5.38	14.90	5.38	15.20	5.38	15.50	5.98	15.62	6.82	15.74	8.37	15.86	10.64
		2.5	13.20	11.88	14.10	11.88	14.40	11.88	14.70	13.20	14.82	15.05	14.94	18.48	15.06	23.50
		4.0	12.70	18.36	13.60	18.36	13.90	18.36	14.20	20.40	14.32	23.26	14.44	28.56	14.56	36.31
	2900	1.0	30.80	12.78	31.70	12.78	32.00	12.78	32.30	14.20	32.42	16.19	32.54	19.88	32.66	25.28
		2.5	30.00	25.56	30.90	25.56	31.20	25.56	31.50	28.40	31.62	32.38	31.74	39.76	31.86	50.55
		4.0	29.50	38.34	30.40	38.34	30.70	38.34	31.00	42.60	31.12	48.56	31.24	59.64	31.36	75.83
3G60*6-46	1450	4.0	12.70	18.72	13.60	18.72	13.90	18.72	14.20	20.80	14.32	23.71	14.44	29.12	14.56	37.02
		5.0	12.40	23.04	13.30	23.04	13.60	23.04	13.90	25.60	14.02	29.18	14.14	35.84	14.26	45.57
		6.3	12.00	28.62	12.90	28.62	13.20	28.62	13.50	31.80	13.62	36.25	13.74	44.52	13.86	56.60
	2900	4.0	29.50	40.14	30.40	40.14	30.70	40.14	31.00	44.60	31.12	50.84	31.24	62.44	31.36	79.39
		5.0	29.20	48.69	30.10	48.69	30.40	48.69	30.70	54.10	30.82	61.67	30.94	75.74	31.06	96.30
		6.3	28.80	59.67	29.70	59.67	30.00	59.67	30.30	66.30	30.42	75.58	30.54	92.82	30.66	118.0
3G60*8-46	1450	6.0	12.70	27.54	13.60	27.54	13.90	27.54	14.20	30.60	14.32	64.88	14.44	42.84	14.56	54.49
		8.0	12.30	36.09	13.20	36.09	13.50	36.09	13.80	40.10	13.92	45.71	14.04	56.14	14.16	71.38
		10	11.90	44.64	12.80	44.64	13.10	44.64	13.40	49.60	13.52	56.54	13.64	69.44	13.76	88.29
	2900	6.0	29.50	58.59	30.40	58.59	30.70	58.59	31.00	65.10	31.12	74.21	31.24	91.14	31.36	115.9
		8.0	29.10	75.51	30.00	75.51	30.30	75.51	30.60	83.90	30.72	95.65	30.84	117.5	30.96	149.3
		10	28.70	91.80	29.60	91.80	29.90	91.80	30.20	102.0	30.32	116.3	30.44	142.8	30.56	181.6
3G60*12-46	1450	10	12.50	45.18	13.40	45.18	13.70	45.18	14.00	50.20	14.12	57.23	14.24	70.28	14.36	89.36
		14	12.00	62.19	12.90	62.19	13.20	62.19	13.50	69.10	13.62	78.77	13.74	96.74	13.86	123.0
		16	11.70	70.65	12.60	70.65	12.90	70.65	13.20	78.50	13.32	89.49	13.44	109.9	13.56	139.7
	2900	10	29.30	94.50	30.20	94.50	30.20	94.50	30.80	105.0	30.92	119.7	31.04	147.0	31.16	186.9
		14	28.80	128.7	29.70	128.7	30.00	128.7	30.30	143.0	30.42	163.0	30.54	200.2	30.66	254.5
		16	28.5	145.8	29.40	145.8	29.70	145.8	30.00	162.0	30.12	184.7	30.24	226.8	30.36	288.4

技术性能表 Table of Technic Performance

型号 Model	转速 r/min	压力 MPa	运动粘度 mm ² /s (°E)													
			6(1.5)		20(3)		40(5)		75(10)		150(20)		380(50)		760(100)	
			流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw
3G70*2-46	1450	0.6	22.90	5.09	23.80	5.09	24.10	5.09	24.40	5.66	24.52	6.45	24.64	7.92	24.76	10.07
		1.0	22.20	7.88	23.10	7.88	23.40	7.88	23.70	8.75	23.82	9.98	23.94	12.25	24.06	15.57
		1.6	21.40	12.06	22.30	12.06	22.60	12.06	22.90	13.40	23.02	15.28	23.14	18.78	23.26	23.85
	2900	0.6	49.60	11.88	50.50	11.88	50.80	11.88	51.10	13.20	51.22	15.05	51.34	18.48	51.46	23.50
		1.0	48.90	17.28	49.80	17.28	50.10	17.28	50.40	19.20	50.52	21.89	50.64	26.88	50.76	34.18
		1.6	48.10	25.47	49.00	25.47	49.30	25.47	49.60	28.30	49.72	32.26	49.84	39.62	49.96	50.37
3G40*3-46	1450	1.0	22.20	8.14	23.10	8.14	23.40	8.14	23.70	9.04	23.82	10.31	23.94	12.66	24.06	16.09
		1.5	21.50	11.60	22.40	11.60	22.70	11.60	23.00	12.90	23.12	14.71	23.24	18.06	23.36	22.96
		2.5	20.50	18.45	21.40	18.45	21.70	18.45	22.00	20.50	22.12	23.37	22.24	28.70	22.36	36.49
	2900	1.0	48.90	18.45	49.80	18.45	50.10	18.45	50.40	20.50	50.52	23.37	50.64	28.70	50.76	36.49
		1.5	48.20	25.29	49.10	25.29	49.40	25.29	49.70	28.10	49.82	32.03	49.94	39.34	50.06	50.02
		2.5	47.20	38.88	48.10	38.88	48.40	38.88	48.70	43.20	48.82	49.25	48.94	60.48	49.06	76.9
3G70*4-46	1450	1.0	23.40	8.54	24.30	8.54	24.60	8.54	24.90	9.49	25.02	10.82	25.14	13.29	25.26	16.89
		2.5	22.40	18.80	23.30	18.80	23.60	18.80	23.90	20.90	24.02	23.83	24.14	29.26	24.26	37.2
		4.0	21.60	29.16	22.50	29.16	22.80	29.16	23.10	32.40	23.22	36.94	23.34	45.36	23.46	57.67
	2900	1.0	50.10	20.25	51.00	20.25	51.30	20.25	51.60	22.50	51.72	25.65	51.84	31.50	51.96	40.05
		2.5	49.10	40.60	50.00	40.60	50.30	40.60	50.60	45.10	50.72	51.41	50.84	63.14	50.96	80.28
		4.0	48.30	60.93	49.20	60.93	49.50	60.93	49.80	67.70	49.92	77.18	50.04	94.78	50.16	120.5
3G70*6-46	1450	4.0	21.60	29.70	22.50	29.70	22.80	29.70	23.10	33.00	23.22	37.62	23.34	46.20	23.46	58.74
		5.0	21.20	36.54	22.10	36.54	22.40	36.54	22.70	40.60	22.82	46.28	22.94	56.84	23.06	72.27
		6.3	20.70	45.36	21.60	45.36	21.90	45.36	22.20	50.40	22.32	57.46	22.44	70.56	22.56	89.71
	2900	4.0	48.30	63.80	49.20	63.81	49.50	63.81	49.80	70.90	49.92	80.83	50.04	99.26	50.16	126.2
		5.0	47.90	77.22	48.80	77.22	49.10	77.22	49.40	85.80	49.52	97.81	49.64	120.1	49.76	152.7
		6.3	47.40	94.50	48.30	94.50	48.60	94.50	48.90	105.0	49.02	119.7	49.14	140.0	49.26	186.9
3G70*8-46	1450	6.0	21.50	43.74	22.40	43.74	22.70	43.74	23.0	48.60	23.12	55.40	23.24	68.04	23.36	86.51
		8.0	21.00	57.33	21.90	57.33	22.20	57.33	22.50	63.70	22.62	72.62	22.74	89.18	22.86	113.4
		10	20.50	70.92	21.40	70.92	21.70	70.92	22.00	78.80	22.12	89.83	22.24	110.3	22.36	140.3
	2900	6.0	48.20	92.70	49.10	92.70	49.40	92.70	49.70	103.0	49.82	117.4	49.94	144.2	50.06	183.3
		8.0	47.70	119.7	48.60	119.7	48.90	119.7	49.20	133.0	49.32	151.6	49.44	186.2	49.56	236.7
		10	47.20	146.7	48.10	146.7	48.40	146.7	48.70	163.0	48.82	185.8	48.94	228.2	49.06	290.0

技术性能表 Table of Technic Performance

型号 Model	转速 r/min	压力 MPa	运动粘度 mm ² /s (°E)													
			6(1.5)		20(3)		40(5)		75(10)		150(20)		380(50)		760(100)	
			流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw
3G80*2-46	1450	0.6	35.10	7.59	36.00	7.59	36.30	7.59	36.60	8.43	36.72	9.61	36.84	11.80	36.96	15.00
		1.0	34.20	11.79	35.10	11.79	35.40	11.79	35.70	13.10	35.82	14.93	35.94	18.34	36.06	23.32
		1.6	33.10	18.00	34.00	18.00	34.30	18.00	34.60	20.00	34.72	22.80	34.84	28.00	34.96	35.60
	2900	0.6	74.90	17.73	75.80	17.73	76.10	17.73	76.40	19.70	76.52	22.46	76.64	27.58	76.76	35.07
		1.0	74.00	25.83	74.90	25.83	75.20	25.83	75.50	28.70	75.62	32.72	75.74	40.18	75.86	51.09
		1.6	72.90	38.07	73.80	38.07	74.10	38.07	74.40	42.30	74.52	48.22	74.64	59.22	74.76	75.29
3G80*3-46	1450	1.0	34.20	12.15	35.10	12.15	35.40	12.15	35.70	13.50	35.82	15.39	35.94	18.90	36.06	24.03
		1.5	33.20	17.28	34.10	17.28	34.40	17.28	34.70	19.20	34.82	21.89	34.94	26.88	35.06	34.18
		2.5	31.70	27.63	32.60	27.63	32.90	27.63	33.20	30.70	33.32	35.00	33.44	42.98	33.56	54.65
	2900	1.0	74.00	27.62	74.90	27.63	75.20	27.63	75.50	30.70	75.62	35.00	75.74	42.98	75.86	54.65
		1.5	73.10	37.71	74.00	37.71	74.30	37.71	74.60	41.90	74.72	47.77	74.84	58.66	74.96	74.58
		2.5	71.60	58.05	72.50	58.05	72.80	58.05	73.10	64.50	73.22	73.53	73.34	90.30	73.46	114.8
3G80*4-46	1450	1.0	35.60	12.78	36.50	12.78	36.80	12.78	37.10	14.20	37.22	16.19	37.34	19.88	37.46	25.28
		2.5	33.90	28.08	34.80	28.08	35.10	28.08	35.40	31.20	35.52	35.57	35.64	43.68	35.76	55.54
		4.0	32.80	43.47	33.70	43.47	34.00	43.47	34.30	48.30	34.42	55.06	34.54	67.62	34.66	85.97
	2900	1.0	75.40	30.24	76.30	30.24	76.60	30.24	76.90	33.60	77.02	38.30	77.14	47.04	77.26	59.81
		2.5	73.70	60.57	74.60	60.57	74.90	60.57	75.20	67.30	75.32	76.72	75.44	94.22	75.56	119.8
		4.0	72.60	90.90	73.50	90.90	73.80	90.90	74.10	101.0	74.22	115.1	74.34	141.4	74.46	179.8
3G80*6-46	1450	4.0	33.60	44.37	34.50	44.37	34.80	44.37	35.10	49.30	35.22	56.20	35.34	69.00	35.46	87.75
		5.0	33.00	54.54	33.90	54.54	34.20	54.54	34.50	60.80	34.62	69.08	34.74	84.84	34.86	107.8
		6.3	32.30	67.77	33.20	67.77	33.50	67.77	33.80	75.30	33.92	85.84	34.04	105.4	34.16	134.0
	2900	4.0	73.40	94.50	74.30	94.50	74.60	94.50	74.90	105.0	75.02	119.7	75.14	147.0	75.26	168.9
		5.0	72.80	115.2	73.70	115.2	74.00	115.2	74.30	128.0	74.42	145.9	74.54	179.2	74.66	227.8
		6.3	72.20	141.3	73.10	141.3	73.40	141.3	73.70	157.0	73.82	179.0	73.94	219.8	74.06	279.8
3G90*2-46	1450	0.6	51.10	10.80	52.00	10.80	52.30	10.80	52.60	12.00	52.72	13.68	52.84	16.80	52.96	21.36
		1.0	49.90	16.74	50.80	16.74	51.10	16.74	51.40	18.60	51.52	21.20	51.64	26.04	51.76	33.11
		1.6	48.40	25.56	49.30	25.56	49.60	25.56	49.9	28.40	50.02	32.38	50.14	39.76	50.26	50.55
	2900	0.6	107.5	25.20	108.4	25.20	108.7	25.20	109.0	28.00	109.1	31.92	109.2	39.20	109.4	49.84
		1.0	106.5	36.81	107.4	36.81	107.7	36.81	108.0	40.90	108.1	46.63	108.2	57.26	108.4	72.80
		1.6	104.5	54.18	105.4	54.18	105.7	54.18	106.0	60.20	106.1	68.63	106.2	84.28	106.4	107.2

技术性能表 Table of Technic Performance

型号 Model	转速 r/min	压力 MPa	运动粘度 mm ² /s (°E)													
			6(1.5)		20(3)		40(5)		75(10)		150(20)		380(50)		760(100)	
			流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw
3G90*3-46	1450	1.0	49.90	17.28	50.80	17.28	51.10	17.28	51.40	19.20	51.52	21.89	51.64	26.88	51.76	34.18
		1.5	48.70	24.66	49.60	24.66	49.90	24.66	50.20	27.40	50.32	31.24	50.44	38.36	50.56	48.77
		2.5	46.70	39.33	47.60	39.33	47.90	39.33	48.20	43.70	48.32	49.82	48.44	61.18	48.56	77.79
	2900	1.0	106.5	39.24	107.4	39.24	107.7	39.24	108.0	43.60	108.1	49.70	108.2	61.04	108.4	77.61
		1.5	104.5	53.73	105.4	53.73	105.7	53.73	106.0	59.70	106.1	68.06	106.2	83.58	106.4	106.3
		2.5	102.5	82.62	103.4	82.62	103.7	82.62	104.0	91.80	104.1	104.7	104.2	128.52	104.4	163.4
3G90*4-46	1450	1.0	51.10	18.18	52.00	18.18	52.30	18.18	52.60	20.20	52.72	23.03	52.84	28.28	52.96	35.96
		2.5	48.60	40.05	49.50	40.05	49.80	40.05	50.10	44.50	50.22	50.73	50.34	62.30	50.46	79.21
		4.0	46.90	61.92	47.80	61.92	48.10	61.92	48.40	68.80	48.52	78.43	48.64	96.32	48.76	122.5
	2900	1.0	107.5	43.11	108.4	43.11	108.7	43.11	109.0	47.90	109.1	54.61	109.2	67.06	109.4	85.26
		2.5	104.5	86.22	105.4	86.22	105.7	86.22	106.0	95.80	106.1	109.2	106.2	134.12	106.4	170.5
		4.0	103.5	128.7	104.4	128.7	104.7	128.7	105.0	143.0	105.1	163.0	105.2	200.2	105.4	254.5
3G90*6-46	1450	4.0	48.10	63.18	49.00	63.18	49.30	63.18	49.60	70.20	49.72	78.20	49.84	98.28	49.96	125.0
		5.0	47.20	77.67	48.10	77.67	48.40	77.67	48.70	86.30	48.82	98.38	48.94	120.8	49.06	153.6
		6.3	46.20	96.30	47.10	96.30	47.40	96.30	47.70	107.0	47.82	122.0	47.94	149.8	48.06	190.5
	2900	4.0	104.5	135.0	105.4	135.0	105.7	135.0	106.0	150.0	106.1	171.0	106.2	210.0	106.4	267.0
		5.0	103.5	163.8	104.4	163.8	104.7	163.8	105.0	182.0	105.1	207.5	105.2	254.8	105.4	324.0
		6.3	102.5	200.7	103.4	200.7	103.7	200.7	104.0	223.0	104.1	254.2	104.2	312.2	104.4	397.0
3G90*2-46	1450	6.0	105.5	20.97	106.4	20.97	106.7	20.97	107.0	23.30	107.1	26.56	107.2	32.62	107.4	41.47
		8.0	103.5	32.85	104.4	32.85	104.7	32.85	105.0	36.50	105.1	41.61	105.2	51.10	105.4	64.97
		10	101.5	50.58	102.4	50.58	102.7	50.58	103.0	56.20	103.1	64.07	103.2	78.68	103.4	100.0
	2900	6.0	219.5	47.79	220.4	47.79	220.7	47.79	221.0	53.10	221.1	60.53	221.2	74.34	221.4	94.52
		8.0	217.5	70.92	218.4	70.92	218.7	70.92	219.0	78.80	219.1	89.83	219.2	110.3	219.4	140.3
		10	215.5	105.3	216.4	105.3	216.7	105.3	217.0	117.0	217.1	133.4	217.2	163.8	217.4	208.3
3G90*3-46	1450	10	104.5	28.08	105.4	28.08	105.7	28.08	106.0	31.20	106.1	35.57	106.2	43.68	106.4	55.54
		14	102.5	48.60	103.4	48.60	103.7	48.60	104.0	54.00	104.1	61.56	104.2	75.60	104.4	96.12
		16	99.5	77.94	100.4	77.94	100.7	77.94	101.0	86.60	101.1	98.72	101.2	121.2	101.4	154.2
	2900	10	218.5	64.44	219.4	64.44	219.7	64.44	220.0	71.60	220.1	81.62	220.2	100.2	220.4	127.5
		14	215.5	104.4	216.4	104.4	216.7	104.4	217.0	116.0	217.1	132.2	217.2	162.4	217.4	206.5
		16	212.5	162.0	213.4	162.4	213.7	162.0	217.0	180.0	214.1	205.2	214.2	252.0	214.4	320.4

技术性能表 Table of Technic Performance

型号 Model	转速 r/min	压力 MPa	运动粘度 mm ² /s (°E)													
			6(1.5)		20(3)		40(5)		75(10)		150(20)		380(50)		760(100)	
			流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw
3G 100*2-46	1450	0.6	70.78	14.85	71.92	14.85	72.34	14.85	72.70	16.50	72.88	18.81	73.12	23.10	73.30	29.37
		1.0	69.28	22.95	70.42	22.95	70.84	22.95	71.20	25.50	71.38	29.07	71.62	35.70	71.80	45.39
		1.6	37.58	35.10	68.72	35.10	69.14	35.10	69.50	39.00	69.68	44.46	69.92	54.60	70.10	69.42
	2900	0.6	148.1	34.56	149.2	34.56	149.6	34.56	150.0	38.40	150.2	43.78	150.4	53.76	150.6	68.35
		1.0	147.1	50.49	148.2	50.49	148.6	50.49	149.0	56.10	149.2	63.95	149.4	78.54	149.6	99.86
		1.6	145.1	74.34	146.2	74.34	146.6	74.34	147.0	82.60	147.2	94.16	147.4	115.6	147.6	147.0
3G 100*3-46	1450	1.0	69.28	23.67	70.42	23.67	70.84	23.67	71.20	26.30	71.38	29.98	71.62	36.82	71.80	46.81
		1.5	67.88	33.75	69.02	33.75	69.44	33.75	69.80	37.50	69.98	42.75	70.22	52.50	70.40	66.75
		2.5	65.48	53.91	66.62	53.91	67.04	53.91	67.40	59.90	67.58	68.29	67.82	83.86	68.00	106.6
	2900	1.0	147.1	53.91	148.2	53.91	148.6	53.91	149.0	59.90	149.2	68.29	149.4	83.86	149.6	106.6
		1.5	145.1	73.71	146.2	73.71	146.6	73.71	147.0	81.90	147.2	93.37	147.4	114.7	147.6	145.8
		2.5	143.1	112.5	144.2	112.5	144.6	112.5	145.0	125.0	145.2	142.5	145.4	175.0	145.6	222.5
3G 100*4-46	1450	1.0	70.88	24.93	72.02	24.93	72.44	24.93	72.80	27.70	72.98	31.58	73.22	38.78	73.40	49.31
		2.5	68.08	54.90	69.22	54.90	69.64	54.90	70.00	61.00	70.18	69.54	70.42	85.40	70.60	108.6
		4.0	65.98	84.96	67.12	84.96	67.54	84.96	67.90	94.40	68.08	107.6	68.32	132.2	68.50	168.0
	2900	1.0	148.1	59.13	149.2	59.13	149.6	59.13	150.0	65.70	150.2	74.90	150.4	91.98	150.6	117.0
		2.5	145.1	117.9	146.2	117.9	146.6	117.9	147.0	131.0	147.2	149.3	147.4	183.4	147.6	233.2
		4.0	143.1	177.3	144.2	177.3	144.6	177.3	145.0	197.0	145.2	224.6	145.4	275.8	145.6	350.7
3GS 100*2-46	1450	0.6	146.1	28.80	147.2	28.80	147.6	28.80	148.0	32.00	148.2	36.48	148.4	44.80	148.6	56.96
		1.0	144.1	45.00	145.2	45.00	145.6	45.00	146.0	50.00	146.2	57.00	146.4	70.00	146.6	89.00
		1.6	141.0	69.30	142.2	69.30	142.6	69.30	143.0	77.00	143.2	87.78	143.4	107.8	143.6	137.1
3GS 100*3-46	1450	0.8	145.1	38.43	146.2	38.43	146.6	38.43	147.0	42.70	147.2	48.68	147.4	59.78	147.6	76.00
		1.5	141.1	66.69	142.2	66.69	142.6	66.69	143.0	74.10	143.2	84.47	143.4	103.7	143.6	131.9
		2.5	138.1	106.2	139.2	106.2	139.6	106.2	140.0	118.0	140.2	134.5	140.4	165.2	140.6	210.0

技术性能表 Table of Technic Performance

型号 Model	转速 r/min	压力 MPa	运动粘度 mm ² /s (°E)													
			6(1.5)		20(3)		40(5)		75(10)		150(20)		380(50)		760(100)	
			流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw
3G 110 ² -46	950	0.6	58.98	12.33	60.12	12.33	60.54	12.33	60.90	13.70	61.08	15.62	61.32	19.18	61.50	24.39
		1.0	54.58	19.62	58.12	19.62	58.54	19.62	58.90	21.80	59.08	24.85	59.32	30.52	59.50	38.80
		1.6	54.58	30.42	55.72	30.42	56.14	30.42	56.5	33.80	56.68	38.53	56.92	47.32	57.10	60.16
	1450	0.6	94.78	19.71	95.92	19.71	96.34	19.71	96.70	21.90	96.88	24.97	97.12	30.66	97.30	38.98
		1.0	92.68	30.51	93.82	30.51	94.24	30.51	94.60	33.90	94.78	38.65	95.02	47.46	95.20	60.34
		1.6	90.28	46.71	91.42	46.71	91.84	46.71	92.20	51.90	92.38	59.17	92.62	72.66	92.80	92.38
3G 110 ³ -46	950	1.0	56.98	19.89	58.12	19.89	58.54	19.89	58.90	22.10	59.08	25.18	59.32	30.94	59.50	39.34
		1.5	54.98	28.80	56.12	28.80	56.54	28.80	56.90	32.00	57.08	36.48	57.32	44.80	57.50	56.96
		2.5	51.78	46.71	52.92	46.71	53.34	46.71	53.70	51.90	53.88	59.17	54.12	72.66	54.30	92.38
	1450	1.0	92.68	31.59	93.82	31.59	94.24	31.59	94.60	35.10	94.78	40.01	95.02	49.14	95.20	62.48
		1.5	90.68	45.00	91.82	45.00	92.24	45.00	92.60	50.00	92.78	57.00	93.02	70.00	93.20	89.00
		2.5	87.48	71.73	88.62	71.73	89.04	71.73	89.40	79.70	89.58	90.88	89.82	111.6	90.00	141.9
3G 110 ⁴ -46	950	1.0	60.28	20.52	61.42	20.52	61.84	20.52	62.20	22.80	62.38	25.99	62.62	31.92	62.80	40.58
		2.5	56.98	47.07	58.12	47.07	58.54	47.07	58.90	52.30	59.08	59.62	59.32	73.22	59.50	93.09
		4.0	54.58	73.53	55.72	73.53	56.14	73.53	56.50	8.70	56.68	93.14	56.92	114.4	57.10	145.4
	1450	1.0	95.98	33.12	97.12	33.12	97.54	33.12	97.90	36.80	98.08	41.95	98.32	51.52	98.50	65.50
		2.5	92.68	73.08	93.82	73.08	94.24	73.08	94.60	81.20	94.78	92.57	95.02	113.7	95.20	144.5
		4.0	90.24	112.5	91.38	112.5	91.80	112.5	92.20	125.0	92.38	142.5	92.58	175.0	92.76	222.5
3GS 110 ² -46	950	0.6	119.1	24.21	120.2	24.21	120.6	24.21	121.0	26.90	121.2	36.67	121.4	37.66	121.6	47.88
		1.0	115.1	38.61	116.2	38.61	116.6	38.61	117.0	42.90	117.2	48.91	117.4	60.06	117.6	76.36
		1.6	141.1	60.30	112.2	60.30	112.6	60.30	113.0	67.00	113.2	76.38	113.4	93.80	113.6	119.3
	1450	0.6	191.1	38.34	192.2	38.34	192.6	38.34	193.0	42.60	193.2	48.56	193.4	59.64	193.6	75.83
		1.0	187.1	59.94	188.2	59.94	188.6	59.94	189.0	66.60	189.2	75.92	189.4	93.24	189.6	118.6
		1.6	182.1	91.80	183.2	91.80	183.6	91.80	184.0	102.0	184.2	116.3	184.4	142.8	184.6	181.6
3GS 110 ³ -46	950	0.8	117.1	32.13	118.2	32.13	118.6	32.13	119.0	35.70	119.2	40.70	119.4	49.98	119.6	63.55
		1.5	111.1	57.15	112.2	57.15	112.6	57.15	113.0	63.50	113.2	72.39	113.4	88.90	113.6	113.0
		2.5	105.1	92.70	106.2	92.70	106.6	92.70	107.0	103.0	107.2	117.4	107.4	144.2	107.6	183.3
	1450	0.8	189.1	51.21	190.2	51.21	190.6	51.21	191.0	56.90	191.2	64.87	191.4	79.66	191.6	101.3
		1.5	183.1	88.74	184.2	88.74	184.6	88.74	185.0	68.60	185.2	112.4	185.4	138.0	185.6	175.5
		2.5	176.1	142.2	177.2	142.2	177.6	142.2	178.0	158.0	178.2	180.1	178.4	221.2	178.6	281.2



技术性能表 Table of Technic Performance

型号 Model	转速 r/min	压力 MPa	运动粘度 mm ² /s (°E)													
			6(1.5)		20(3)		40(5)		75(10)		150(20)		380(50)		760(100)	
			流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw
3G 120*2-46	950	0.6	77.68	16.02	78.82	16.02	79.24	16.02	79.60	17.80	79.78	20.29	80.02	24.92	80.20	31.68
		1.0	75.28	25.38	76.42	25.38	76.84	25.38	77.20	28.20	77.38	32.15	32.15	39.48	77.80	50.20
		1.6	72.28	39.50	73.42	39.50	73.84	39.50	74.20	43.90	74.38	50.05	50.05	61.46	74.80	78.14
	1450	0.6	123.1	25.65	124.2	25.65	124.6	25.65	125.0	28.50	125.2	32.50	32.50	39.90	125.6	50.73
		1.0	121.1	39.69	122.2	39.69	122.6	39.69	123.0	44.10	123.2	50.27	50.27	61.74	123.6	78.50
		1.6	118.1	60.66	119.2	60.66	119.6	60.66	120.0	67.40	120.2	76.84	76.84	94.36	120.6	120.0
3G 120*3-46	950	1.0	75.28	25.83	76.42	25.83	76.84	25.83	77.20	28.70	77.38	32.72	32.72	40.18	77.80	51.10
		1.5	72.78	37.44	73.92	37.44	74.34	37.44	74.70	41.60	74.88	47.42	47.42	58.24	75.30	74.05
		2.5	68.84	60.65	69.98	60.65	70.40	60.65	70.80	67.40	70.94	76.84	76.84	94.36	71.36	120.0
	1450	1.0	121.1	40.95	122.2	40.95	122.6	40.95	123.0	45.50	123.2	51.87	51.87	63.70	123.6	81.00
		1.5	119.1	58.40	120.2	58.40	120.6	58.40	121.0	64.90	121.2	74.00	74.00	90.86	121.6	115.5
		2.5	115.1	92.70	116.2	92.70	116.6	92.70	117.0	103.0	117.2	117.4	117.4	144.2	117.6	183.3
3G 120*4-46	950	1.0	79.28	26.65	80.42	26.65	80.84	26.65	81.20	29.60	81.38	33.74	33.74	41.45	81.80	52.69
		2.5	75.28	61.00	76.42	61.00	76.84	61.00	77.20	67.80	77.38	77.29	77.29	94.92	77.80	120.7
		4.0	72.38	95.40	73.52	95.40	73.94	95.40	74.30	106.0	74.48	120.8	120.8	148.4	74.90	188.7
	1450	1.0	125.1	43.00	126.2	43.00	126.6	43.00	127.0	47.80	127.2	54.49	54.49	66.92	127.6	85.08
		2.5	121.1	94.50	122.2	94.50	122.6	94.50	123.0	105.0	123.2	119.7	119.7	147.0	123.6	186.9
		4.0	118.1	146.7	119.2	146.7	119.6	146.7	120.0	163.0	120.2	185.8	185.8	228.0	120.6	290.0
3GS 120*2-46	950	0.6	156.1	31.40	157.2	31.40	157.6	31.40	158.0	34.90	158.2	39.79	39.79	48.86	158.6	62.12
		1.0	151.1	50.20	152.2	50.20	152.6	50.20	153.0	55.80	153.2	63.60	63.60	78.12	153.6	99.32
		1.6	145.1	78.30	146.2	78.30	146.6	78.30	147.0	87.00	147.2	99.18	99.18	121.8	147.6	154.9
	1450	0.6	249.1	49.77	250.2	49.77	250.6	49.77	251.0	55.30	251.2	63.04	63.04	77.42	251.6	98.43
		1.0	244.1	77.76	245.2	77.76	245.6	77.76	246.0	86.40	246.2	98.50	98.50	121.0	246.6	153.8
		1.6	238.1	119.7	239.2	119.7	239.6	119.7	240.0	133.0	240.2	151.6	151.6	186.2	240.6	236.7
3GS 120*3-46	950	0.8	153.1	41.76	154.2	41.76	154.6	41.76	155.0	46.40	155.2	52.90	52.90	64.96	155.6	82.60
		1.5	146.1	74.25	147.2	74.25	147.6	74.25	148.0	82.50	148.2	94.05	94.05	115.5	148.6	146.9
		2.5	138.1	120.6	139.2	120.6	139.6	120.6	140.0	134.0	140.2	152.7	152.7	187.6	140.6	238.5
	1450	0.8	246.1	66.50	247.2	66.50	247.6	66.50	248.0	73.90	248.2	84.25	84.25	103.5	248.6	131.5
		1.5	239.1	115.0	240.2	115.0	240.6	115.0	241.0	128.0	241.2	146.0	146.0	179.0	241.6	227.8
		2.5	231.1	184.5	232.2	184.5	232.6	184.5	233.0	205.0	233.2	233.7	233.7	287.0	233.6	365.0

技术性能表 Table of Technic Performance

型号 Model	转速 r/min	压力 MPa	运动粘度 mm ² /s (°E)													
			6(1.5)		20(3)		40(5)		75(10)		150(20)		380(50)		760(100)	
			流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw
3G 140*2-46	950	0.6	124.0	25.50	126.4	25.50	127.2	25.50	128.0	28.30	128.4	32.26	128.8	39.60	129.0	50.37
		1.0	121.0	40.30	123.4	40.30	124.2	40.30	125.0	44.80	125.4	51.07	125.8	62.72	126.0	79.75
		1.6	117.0	62.70	119.4	62.70	120.2	62.70	121.0	69.70	121.4	79.46	121.8	97.60	122.0	124.0
	1450	0.6	188.0	40.80	200.4	40.80	201.2	40.80	202.0	45.30	202.4	51.64	202.8	63.42	203.0	80.63
		1.0	195.0	63.00	197.4	63.00	198.2	63.00	199.0	70.00	199.4	79.80	199.8	98.00	200.0	124.6
		1.6	191.0	96.30	193.4	96.30	194.2	96.30	195.0	107.0	195.4	122.0	195.8	149.8	196.0	190.5
3G 140*3-46	950	1.0	121.0	41.00	123.4	41.00	124.2	41.00	125.0	45.60	125.4	52.00	125.8	63.80	126.0	81.20
		1.5	118.0	59.50	120.4	59.50	121.2	59.50	122.0	66.10	122.4	75.35	122.8	92.50	123.0	117.6
		2.5	113.0	96.30	115.4	96.30	116.2	96.30	117.0	107.0	117.4	122.0	117.8	149.8	118.0	190.5
	1450	1.0	195.0	65.00	197.4	65.00	198.2	65.00	199.0	72.30	199.4	82.42	199.8	102.2	200.0	128.7
		1.5	192.0	92.70	194.4	92.70	195.2	92.70	196.0	103.0	196.4	117.4	196.8	144.2	197.0	183.3
		2.5	186.0	147.6	188.4	147.6	189.2	147.6	190.0	164.0	190.4	186.9	190.8	229.6	191.0	292.0
3GS 140*2-46	950	0.6	254.0	49.95	256.4	49.95	257.2	49.95	258.0	55.50	258.4	63.27	258.8	77.70	259.0	98.80
		1.0	248.0	79.65	250.4	79.65	251.2	79.65	252.0	88.50	252.4	100.9	252.8	123.9	253.0	157.5
		1.6	241.0	124.2	243.4	124.2	244.2	124.2	245.0	138.0	245.4	157.3	245.8	193.2	246.0	245.6
	1450	0.6	402.0	79.00	404.4	79.00	405.2	79.00	406.0	87.80	406.4	100.0	406.8	122.9	407.0	156.3
		1.0	395.0	123.3	397.4	123.3	398.2	123.3	399.0	137.0	399.4	156.2	399.8	191.8	400.0	243.9
		1.6	388.0	189.9	390.4	189.9	391.2	189.9	392.0	211.0	392.4	240.5	392.8	295.4	393.0	375.6
3GS 140*3-46	950	0.8	251.0	66.33	253.4	66.33	254.2	66.33	255.0	73.70	255.4	84.00	255.8	103.2	256.0	131.2
		1.5	242.0	117.9	244.4	117.9	245.2	117.9	246.0	131.0	246.4	149.3	246.8	183.4	247.0	233.2
		2.5	232.0	190.8	234.4	190.8	235.2	190.8	236.0	212.0	236.4	241.7	236.8	296.8	237.0	377.4
	1450	0.8	398.0	105.3	400.4	105.3	401.2	105.3	402.0	117.0	402.4	133.4	402.8	163.8	403.0	208.3
		1.5	389.0	182.7	391.4	182.7	392.2	182.7	393.0	203.0	393.4	231.4	393.8	284.2	394.0	361.3
		2.5	379.0	293.4	381.4	293.4	382.2	293.4	383.0	326.0	383.4	371.6	383.8	456.4	384.0	580.0
3G 160*2-46	950	0.6	187.7	38.00	190.9	38.00	192.0	38.00	193.0	42.30	193.5	48.20	194.1	59.20	194.4	75.30
		1.0	183.7	60.00	186.9	60.00	188.0	60.00	189.0	66.90	189.5	76.30	190.1	93.70	190.4	119.0
		1.6	177.7	93.60	180.9	93.60	182.0	93.60	183.0	104.0	183.5	118.6	184.1	145.6	184.4	185.0
	1450	0.6	297.7	60.75	300.9	60.75	302.0	60.75	303.0	67.50	303.5	76.95	304.1	94.50	304.4	120.0
		1.0	293.7	93.60	196.9	93.60	298.0	93.60	299.0	104.0	299.5	118.6	300.1	145.6	300.4	185.0
		1.6	288.7	143.0	291.9	143.0	292.0	143.0	293.0	159.0	293.5	181.3	294.1	222.6	294.4	283.0
3G 160*3-46	950	1.0	183.7	61.30	186.9	61.30	188.0	61.30	189.0	68.10	189.5	77.63	190.1	95.34	190.4	121.2
		1.5	178.7	88.75	181.9	88.75	183.0	88.75	184.0	98.60	184.5	112.4	185.1	138.0	185.4	175.5
		2.5	171.7	143.0	174.9	143.0	176.0	143.0	177.0	159.0	177.5	181.3	178.1	222.6	178.4	283.0
	1450	1.0	293.7	96.30	296.9	96.30	298.0	96.30	299.0	107.0	299.5	122.0	300.1	149.8	300.4	190.5
		1.5	288.7	137.7	291.9	137.7	293.0	137.7	294.0	153.0	294.5	174.0	295.1	214.0	295.4	272.0
		2.5	281.7	220.5	284.9	220.5	286.0	220.5	287.0	245.0	287.5	279.0	288.1	343.0	288.4	436.0
3GS 160*2-46	950	0.6	385.7	74.50	388.9	74.50	390.0	74.50	391.0	82.80	391.5	94.40	392.1	116.0	392.4	147.4
		1.0	378.7	119.0	381.9	119.0	383.0	119.0	384.0	132.0	384.5	150.5	385.1	185.0	385.4	235.0
		1.6	369.7	185.4	372.9	185.4	374.0	185.4	375.0	206.0	375.5	235.0	376.1	288.0	376.4	367.0
	1450	0.6	605.7	118.0	608.9	118.0	610.0	118.0	611.0	131.0	611.5	149.3	612.1	183.0	612.4	233.0
		1.0	598.7	183.6	601.9	183.6	603.0	183.6	604.0	204.0	604.5	232.5	605.1	285.6	605.4	363.0
		1.6	589.7	283.5	592.9	283.5	594.0	283.5	595.0	315.0	595.5	359.0	596.1	441.0	596.4	561.0

技术性能表 Table of Technic Performance

型号 Model	转速 r/min	压力 MPa	运动粘度 mm ² /s (°E)													
			6(1.5)		20(3)		40(5)		75(10)		150(20)		380(50)		760(100)	
			流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw
3G 180°2-46	720	0.6	191.5	40.50	199.7	40.50	202.5	40.50	205.0	45.00	206.4	51.30	207.9	63.00	208.6	80.00
		1.0	185.5	65.00	193.7	65.00	196.5	65.00	199.0	72.10	200.4	82.20	201.9	101.0	202.6	128.0
		1.6	175.5	101.0	186.7	101.0	189.5	101.0	192.0	112.0	193.4	127.7	194.9	156.8	195.6	199.3
	950	0.6	263.5	54.20	271.7	54.20	274.5	54.20	277.0	60.20	278.4	68.60	279.9	84.30	280.6	107.0
		1.0	257.5	85.80	265.7	85.80	268.5	85.80	271.0	95.30	272.4	108.6	273.9	133.5	274.6	169.5
		1.6	250.5	133.0	258.7	133.0	261.5	133.0	264.0	148.0	265.4	168.7	266.9	207.0	267.6	263.5
3G 180°3-46	720	1.0	185.5	65.50	193.7	65.50	196.5	65.50	199.0	72.70	200.4	83.000	201.9	102.0	202.6	129.0
		1.5	179.5	95.40	187.7	95.40	190.5	95.40	193.0	106.0	194.4	121.0	195.9	148.5	196.6	189.0
		2.5	170.5	155.7	178.7	155.7	181.5	155.7	184.0	173.0	185.4	197.0	186.9	242.0	184.6	308.0
	950	1.0	257.5	87.20	265.7	87.20	268.5	87.20	271.0	96.90	272.4	110.5	273.9	135.5	274.6	172.5
		1.5	251.5	126.0	259.7	126.0	262.5	126.0	265.0	140.0	266.4	159.6	267.9	196.0	268.6	249.0
		2.5	242.5	204.0	250.7	204.0	253.5	204.0	256.0	227.0	257.4	259.0	258.9	318.0	259.6	404.0
3GS 180°2-46	720	0.6	402.5	79.70	410.7	79.7	413.5	79.70	416.0	88.60	417.4	101.0	418.9	124.0	419.6	158.0
		1.0	392.5	128.0	400.7	128.0	403.5	128.0	406.0	142.0	407.4	162.0	408.9	198.8	409.6	252.7
		1.6	380.5	201.0	388.7	201.0	391.5	201.0	394.0	224.0	395.4	255.0	396.9	313.5	397.6	399.0
	950	0.6	546.5	105.0	554.7	105.0	557.5	105.0	560.0	117.0	561.4	133.0	562.9	164.0	563.6	208.0
		1.0	536.5	169.0	544.7	169.0	547.5	169.0	550.0	188.0	551.4	214.0	552.9	263.0	553.6	334.6
		1.6	524.5	263.7	532.7	263.7	535.5	263.7	538.0	293.0	539.4	334.0	540.9	410.0	541.6	521.5
3G 200°2-46	720	0.6	273.5	55.50	281.7	55.50	284.5	55.50	287.0	61.70	288.4	70.30	289.9	86.40	290.6	110.0
		1.0	266.5	89.00	274.7	89.00	277.5	89.0	280.0	99.00	281.4	112.8	282.9	138.6	283.6	176.0
		1.6	258.5	138.6	266.7	138.6	269.5	138.6	272.0	154.0	273.4	175.5	274.9	215.5	275.6	274.0
	950	0.6	371.5	74.25	379.7	74.25	382.5	71.25	385.0	82.50	386.4	94.00	387.9	115.5	388.6	146.8
		1.0	365.5	117.0	373.7	117.0	376.5	117.0	379.0	130.0	380.4	148.0	381.9	182.0	382.6	231.5
		1.6	357.5	182.7	365.7	182.7	368.5	182.7	371.0	203.0	372.4	231.0	373.9	284.0	374.6	361.0
3G 200°3-46	720	1.0	266.5	89.70	274.7	89.70	277.5	89.70	280.0	99.70	281.4	113.7	282.9	139.6	283.6	177.5
		1.5	260.5	130.5	268.7	130.5	271.5	130.5	274.0	145.0	275.4	165.0	276.9	203.0	277.6	258.0
		2.5	249.5	213.0	257.7	213.0	260.5	213.0	263.0	237.0	264.4	270.0	265.9	332.0	266.6	422.0
	950	1.0	365.5	120.0	373.7	120.0	376.5	120.0	379.0	133.0	380.4	151.6	381.9	186.0	382.6	237.0
		1.5	358.5	173.0	366.7	173.0	369.5	173.0	372.0	192.0	373.4	219.0	374.9	269.0	375.6	342.0
		2.5	348.5	281.0	356.7	281.0	359.5	281.0	362.0	312.0	363.4	355.7	364.9	437.0	365.6	555.0
3GS 200°2-46	720	0.6	580.5	109.0	588.7	109.0	571.5	109.0	574.0	121.0	575.4	138.0	576.9	169.5	577.6	215.0
		1.0	547.5	176.5	555.7	176.5	558.5	176.5	561.0	196.0	562.4	223.5	563.9	274.5	564.6	349.0
		1.6	531.5	276.0	539.7	276.0	542.5	276.0	545.0	307.0	546.4	350.0	547.9	430.0	548.6	546.0
	950	0.6	757.5	145.0	765.7	145.0	768.5	145.0	771.0	161.0	772.4	183.5	773.9	225.0	774.6	286.5
		1.0	744.5	232.0	752.7	232.0	755.5	232.0	758.0	258.0	759.4	294.0	760.9	361.0	761.6	459.0
		1.6	729.5	362.0	737.7	362.0	740.5	362.0	743.0	402.0	744.4	458.0	745.9	563.0	746.6	715.5

技术性能表 Table of Technic Performance

型号 Model	转速 r/min	压力 MPa	运动粘度 mm ² /s (°E)													
			6(1.5)		20(3)		40(5)		75(10)		150(20)		380(50)		760(100)	
			流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw
3G36*6-27	2900	4.0	2.24	4.70	2.33	4.70	2.37	4.70	2.40	5.20	2.41	5.93	2.42	7.28	2.44	9.25
		6.3	2.07	6.75	2.16	6.75	2.20	6.75	2.23	7.50	2.24	8.55	2.25	10.50	2.27	13.35
3G36*8-27		10.0	2.04	10.60	2.13	10.60	2.17	10.60	2.20	11.80	2.21	13.45	2.22	16.50	2.24	21.00
3G45*3-36	2900	0.6	8.64	2.25	8.85	2.25	8.91	2.25	9.00	2.50	9.04	2.85	9.07	3.50	9.10	4.45
		1.0	8.54	3.35	8.75	3.35	8.84	3.35	8.90	3.70	8.94	4.20	8.97	5.20	9.00	6.59
		1.6	8.34	4.80	8.55	4.80	8.64	4.80	8.70	5.30	8.74	6.00	8.77	7.40	8.80	9.40
		2.5	7.94	7.75	8.15	7.75	8.24	7.75	8.30	8.60	8.34	9.80	8.37	12.00	8.40	15.30
3G45*6-36		4.0	7.09	13.30	7.30	13.30	7.39	13.30	7.45	14.80	7.49	16.90	7.52	20.70	7.55	26.35
		6.3	6.79	19.30	7.00	19.30	7.09	19.30	7.15	21.40	7.19	24.40	7.22	30.00	7.25	38.10
3G45*8-36		10.0	6.39	30.40	6.60	30.40	6.69	30.40	6.75	33.80	6.79	38.50	6.82	47.30	6.85	60.20
3G80*3-27	1450	0.4	16.40	3.25	17.30	3.25	17.60	3.25	17.90	3.60	18.00	4.10	18.15	5.05	18.26	6.40
		0.6	16.00	4.40	16.90	4.40	17.20	4.40	17.50	4.90	17.62	5.60	17.74	6.85	17.86	8.70
		0.8	15.60	5.40	16.50	5.40	16.80	5.40	17.10	6.00	17.22	6.85	17.34	8.40	17.46	10.70
		1.0	15.30	6.40	16.20	6.40	16.50	6.40	16.80	7.10	16.92	8.10	17.05	9.95	17.16	12.65
		1.6	14.00	9.45	14.90	9.45	15.20	9.45	15.50	10.50	15.62	12.00	15.74	14.70	15.86	18.70
		2.5	13.50	14.70	14.40	14.70	14.70	14.70	15.00	16.30	15.12	18.60	15.24	22.80	15.36	29.00
3G80*4-27		4.0	13.30	23.85	14.20	23.85	14.50	23.85	14.80	26.50	14.92	30.20	15.05	37.10	15.16	47.20
3G80*6-27		6.3	12.80	38.60	13.70	38.60	14.00	38.60	14.30	42.90	14.42	48.90	14.54	60.00	14.66	76.36
3G80*2-36	1450	0.4	23.90	4.50	24.80	4.50	25.10	4.50	25.40	5.00	25.52	5.70	25.64	7.00	25.76	8.90
		0.6	23.30	6.00	24.20	6.00	24.50	6.00	24.80	6.70	24.92	7.64	25.05	9.40	25.16	12.00
		0.8	22.70	7.47	23.60	7.47	23.90	7.47	24.20	8.30	24.32	9.46	24.45	11.60	24.56	14.80
		1.0	22.00	9.00	23.10	9.00	23.40	9.00	23.70	10.00	23.80	11.50	23.95	14.00	24.10	17.80
		1.6	20.50	13.00	21.40	13.00	21.70	13.00	22.00	14.50	22.12	16.50	22.25	20.30	22.36	25.80
		2.5	20.80	20.35	21.70	20.35	22.00	20.35	22.30	22.60	22.40	25.76	22.53	31.60	22.65	40.30
3G80*3-36		4.0	20.30	32.95	21.20	32.95	21.50	32.95	21.80	36.60	21.90	41.70	22.00	51.25	22.16	65.15
3G80*4-36		6.3	18.90	53.40	19.80	53.40	20.10	53.40	20.40	59.30	20.50	67.60	20.65	83.00	20.76	105.5
3G100*2-36	1450	0.4	48.50	8.45	49.60	8.45	50.00	8.45	50.40	9.40	50.60	10.70	50.80	13.20	50.95	16.73
		0.6	47.40	11.40	48.50	11.40	48.95	11.40	49.30	12.70	49.66	14.48	49.90	17.80	50.00	22.60
		0.8	46.30	14.20	47.42	14.20	47.85	14.20	48.20	15.80	48.40	18.00	48.80	22.00	48.92	28.00
		1.0	45.10	16.90	46.20	16.90	46.65	16.90	47.00	18.80	47.20	21.43	47.40	26.30	47.55	33.46
		1.6	42.10	24.85	43.20	24.85	43.65	24.85	44.00	27.60	44.20	31.46	44.40	38.65	44.55	49.00
3G100*3-36		2.5	44.90	38.90	46.00	38.90	46.45	38.90	46.80	43.20	46.98	49.30	47.20	60.50	47.35	76.90
3G100*4-36		4.0	43.10	62.90	44.20	62.90	44.65	62.90	45.00	69.90	45.18	79.70	45.42	97.85	45.55	124.4

技术性能表 Table of Technic Performance

型号 Model	转速 r/min	压力 MPa	运动粘度 mm ² /s (°E)													
			6(1.5)		20(3)		40(5)		75(10)		150(20)		380(50)		760(100)	
			流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw	流量 M ³ /h	功率 kw
3GS 100*2-27	1450	0.4	70.50	12.00	71.60	12.00	72.05	12.00	72.40	13.30	72.58	15.20	72.80	18.60	72.95	23.70
		0.6	69.30	16.00	70.40	16.00	70.85	16.00	71.20	17.90	71.40	20.50	71.62	25.00	71.75	31.90
		0.8	68.58	20.00	69.70	20.00	70.15	20.00	70.50	22.30	70.68	25.40	70.90	31.00	71.05	39.65
		1.0	67.78	23.85	68.90	23.85	69.35	23.85	69.70	26.50	69.90	30.20	70.12	37.10	70.25	47.20
		1.6	61.90	35.10	63.00	35.10	63.45	35.10	63.80	39.00	63.98	44.50	64.20	54.60	64.35	69.40
3GS 100*3-27	1450	2.5	59.40	54.80	60.50	54.80	60.95	54.80	61.30	60.90	61.48	69.40	61.70	85.30	61.85	108.4
3GS 100*4-27		4.0	64.28	88.75	65.42	88.75	65.82	88.75	66.20	98.60	66.38	112.5	66.62	138.0	66.75	175.5
3GS 110*3-27	1450	2.5	88.10	73.80	89.20	73.80	89.65	73.80	90.00	82.00	90.18	93.50	90.40	114.8	90.55	146.0
3GS 110*4-27		4.0	86.10	117.0	87.20	117.0	87.65	117.0	88.00	130.0	88.20	148.0	88.42	182.0	88.55	231.0
3GS 140*2-27	1450	0.4	192.0	34.00	194.5	34.00	195.2	34.00	196.0	37.90	196.4	32.20	196.9	53.00	197.0	67.50
		0.6	191.0	44.35	193.5	44.35	194.2	44.35	195.0	49.30	195.4	56.20	195.9	69.00	196.0	87.75
		0.8	190.0	54.70	192.5	54.70	193.2	54.70	194.0	60.80	194.4	69.30	194.8	85.00	195.0	108.2
3GS 160*2-27	1450	0.4	289.7	48.00	292.9	48.00	294.1	48.00	295.0	53.60	295.5	61.00	296.1	75.00	296.4	95.40
		0.6	287.7	63.90	291.0	63.90	292.1	63.90	293.0	71.00	293.5	81.00	294.1	99.40	294.4	126.4
		0.8	284.7	87.30	287.9	87.30	289.0	87.30	290.0	97.00	290.6	110.6	291.1	135.8	291.4	172.6
		1.0	279.7	94.90	282.9	94.90	284.1	94.90	285.0	105.4	285.5	120.0	286.1	147.5	286.4	187.6
		1.6	264.7	153.0	268.0	153.0	269.0	153.0	270.0	170.0	270.6	193.8	271.1	238.0	271.4	302.6
3GS 200*2-27	960	0.4	366.7	65.00	374.7	65.00	377.6	65.00	380.0	72.20	381.5	82.30	382.9	101.0	383.6	128.5


订货应提供的数据 Supply the data in ordering

- 1、介质工作温度 T。
- 2、工作温度下介质的粘度 V。
- 3、泵的进口压力(或真空度) P1。
- 4、泵的出口压力 P2。
- 5、泵的工作流量。
- 6、泵的安装形式。
- 7、配套要求。

1. Temperature of the medium T.
2. Viscosity of the medium at the temperature V.
3. Pressure at suction (or suction vacuum) P1.
4. Pressure at outlet P2.
5. Delivery.
6. Design of pump.
7. Driving unit.



安装尺寸图 Drawing of mounting dimensions

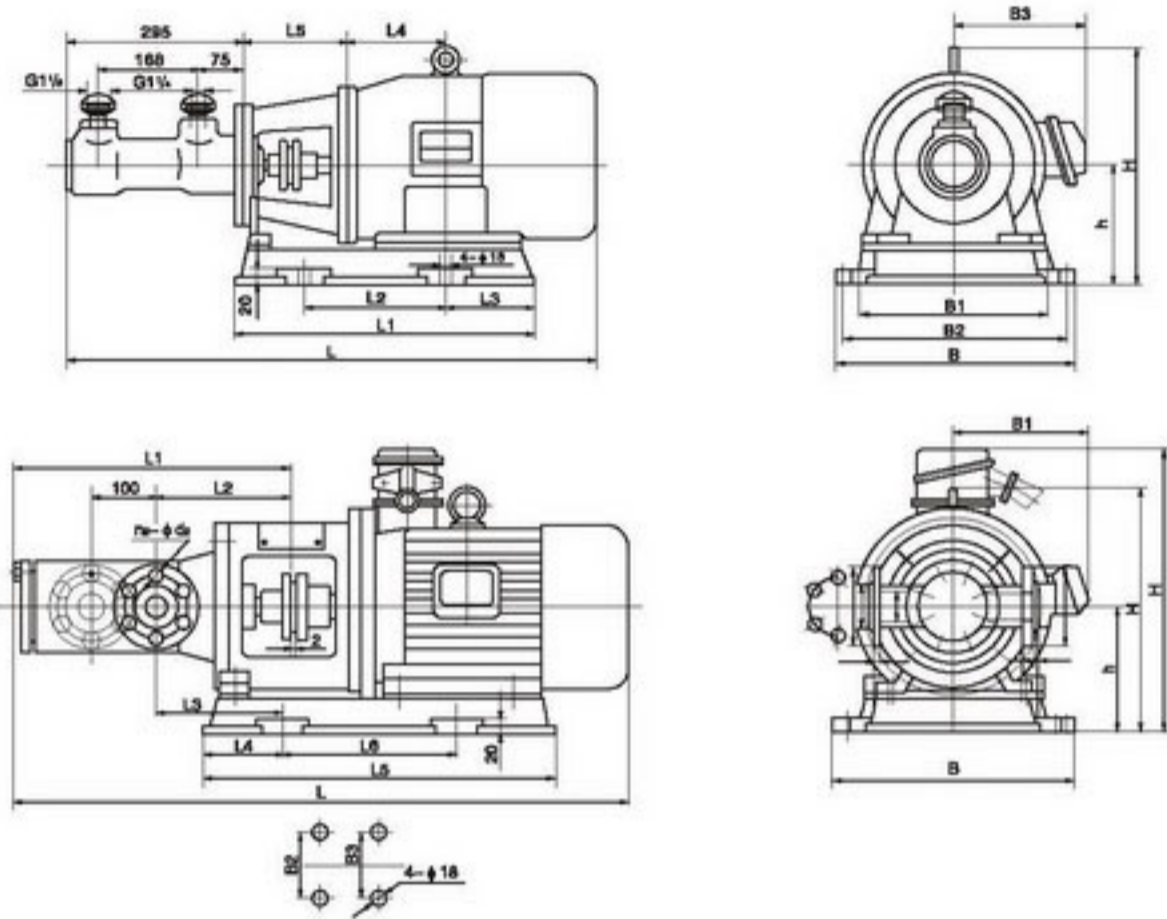


安装尺寸表 Table of mounting dimensions

型号 Model	压力 MPa	尺寸 Dimensions												电机型号 Motor	
		L	L1	L2	L3	L4	L5	B	B1	B2	B3	H	h		n2-d2
3G36*3-46	0.4	715	398	200	105	128	135	320	280	280	165	305	165		YB90L-2B35
	0.6			240	115	145	180				170				YB100L-2B35
	0.8	760	415	240	115	135	165	280	350	210	375	192		YB132S2-2B35	
	1.0					151								390	310
	3G36*6-27	1.6	855	530	250	124	170	165	390	210	310	345	300		YB132S2-2B35
		2.5					190								440
3G36*8-27	4.0	947	120	270	543	190		385	210	310	345	300		YB132S2-2B35	
	6.3	987		350	600	200		440	220	400	400	470	350	6-φ15	YB160M1-2B35
	10.0	1160	140	370	655	220		480	275	430	430	530	350	6-φ17	YB160L-2B35



安装尺寸图 Drawing of mounting dimensions

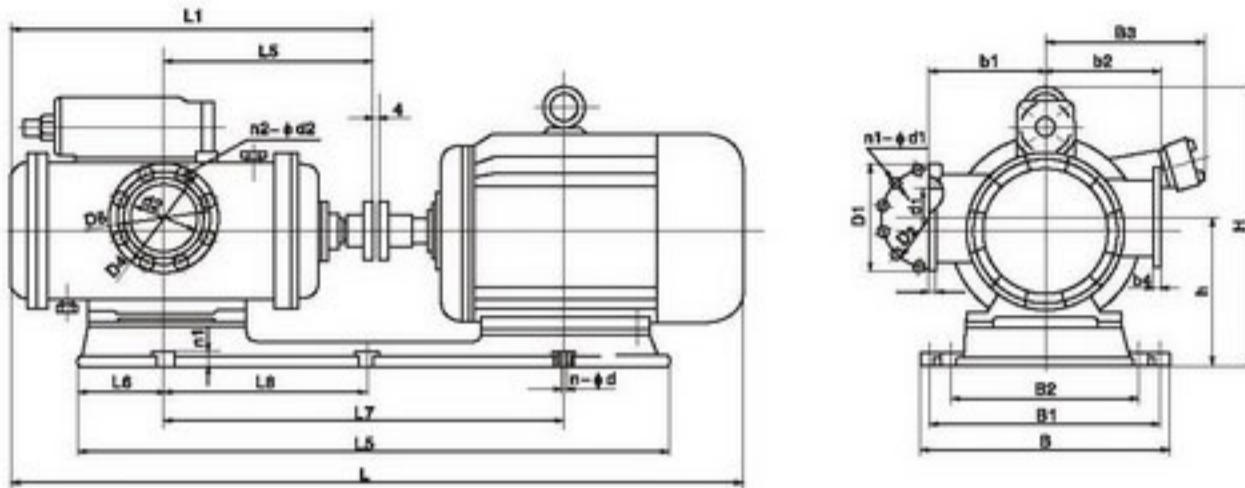


安装尺寸表 Table of mounting dimensions

泵型号 Model	压力 MPa	尺寸 Dimensions																					进口 Inlet	出口 Outlet	电动机 型号 Motor				
		L	L ₁	L ₂	L ₃	L ₄	L ₇	L ₈	B	B ₁	B ₂	B ₃	H	h	h ₁	D ₁	D ₂	D ₄	D ₅	b ₁	b ₂	b ₃				b ₄	n-φd	n-φd ₁	n-φd ₂
3GS 100°3-27	0.4	1515	840	508	1280	182	882	-	560	500	500	285	625	307	30	260	225	270	220	230	270	20	32	4-25	8-18	8-25	150	125	Y180M-4
	0.6	1555	840	508	1280	182	882	-	560	500	500	285	625	307	30	260	225	270	220	230	270	20	32	4-25	8-18	8-25	150	125	Y180L-4
	0.8	1620	840	508	1320	182	907	-	560	500	500	310	625	307	30	260	225	270	220	230	270	20	32	4-25	8-18	8-25	150	125	Y200L-4
	1.0	1690	840	508	1375	182	956	-	600	540	540	345	645	325	30	260	225	270	220	230	270	20	32	4-25	8-18	8-25	150	125	Y225M-4
	1.6	1775	840	508	1445	186	995	-	660	600	500	385	675	350	30	260	225	270	220	230	270	20	32	4-25	8-18	8-25	150	125	Y250M-4
	2.5	1845	840	508	1520	189	1026	-	720	660	520	410	740	380	30	260	225	270	220	230	270	20	32	4-25	8-18	8-25	150	125	Y280S-4
3GS 100°2-46	0.4	1790	1010	580	1470	260	980	980	610	550	550	310	705	330	30	295	265	285	240	300	300	20	26	4-27	12-15.5	12-18	200	175	Y200L-4
	0.6	1860	1010	580	1530	262	1028	514	610	550	550	345	725	350	30	295	265	285	240	300	300	20	26	6-27	12-15.5	12-18	200	175	Y225M-4
	0.8	1945	1010	580	1596	262	1066	533	660	600	600	385	725	350	30	295	265	285	240	300	300	20	26	6-27	12-15.5	12-18	200	175	Y225M-4
	1.0	2015	1010	580	1665	265	1098	549	710	650	650	410	755	380	30	295	265	285	240	300	300	20	26	6-27	12-15.5	12-18	200	175	Y280S-4
	1.6	2215	1010	580	1775	260	1172	586	790	730	530	530	860	415	30	295	265	285	240	300	300	20	26	6-27	12-15.5	12-18	200	175	Y315S-4
3GS 110°4-27	2.5	2307	1164	692	1807	308	1236	618	705	515	625	-	755	415	35	290	255	300	250	280	280	25	30	6-26	8-18	8-25	175	150	BJO ₂ -93-4
	4.0	2448	1164	692	2170	322	1452	726	930	515	850	-	1060	510	35	290	255	300	250	280	280	25	30	6-26	8-18	8-25	175	150	JS116-4
3GS 160°2-27	0.4	2010	1075	618	1715	340	1106	553	760	670	670	-	775	450	40	370	335	335	295	320	-	24	26	6-27	12-18	12-23	250	200	Y250M-4
	0.6	2080	1075	618	1781	340	1138	569	750	660	660	-	810	450	40	370	335	335	295	320	-	24	26	6-27	12-18	12-23	250	200	Y280S-4
	0.8	2280	1075	618	1893	340	1213	606	830	740	740	-	895	450	40	370	355	335	295	320	-	24	26	6-27	12-18	12-23	250	200	Y315S-4
	1.0	2330	1075	618	1942	340	1238	619	830	740	740	-	895	450	40														Y315M2-4
	1.6	-	1075	618	2120	340	1361	680	960	670	870	-	-	550	-	370	335	335	295	320	-	24	25	6-27	12-18	12-23	250	200	BJO ₂ -93-4



安装尺寸图 Drawing of mounting dimensions

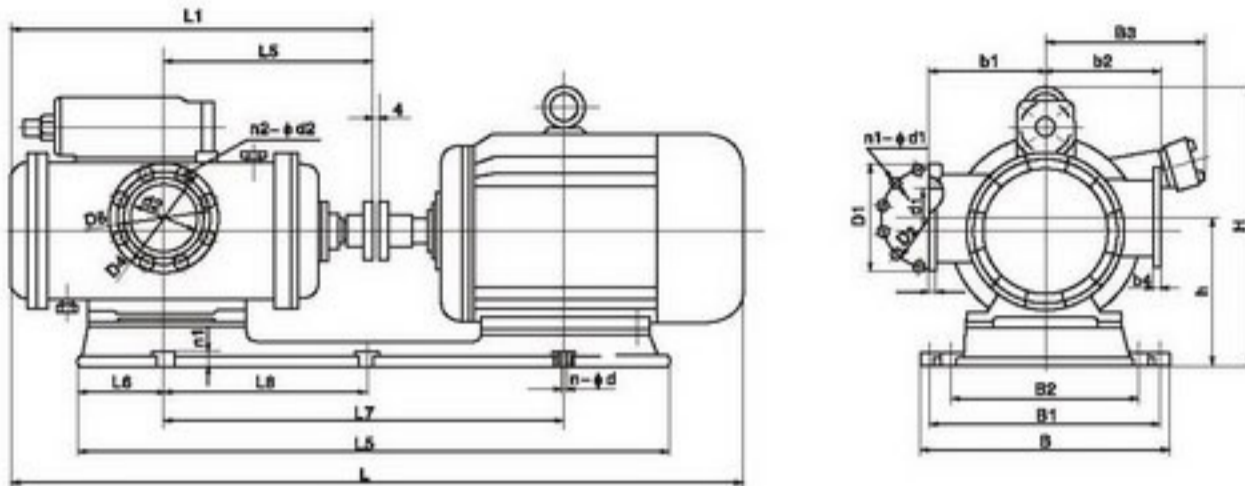


安装尺寸表 Table of mounting dimensions

泵型号 Model	压力 MPa	尺寸 Dimensions																					进口 Inlet	出口 Outlet	电动机 型号 Motor				
		L	L ₁	L ₂	L ₃	L ₄	L ₇	L ₈	B	B ₁	B ₂	B ₃	H	h	h ₁	D ₁	D ₂	D ₄	D ₅	b ₁	b ₂	b ₃				b ₄	n-φd	n-φd	n-φd
3GS 100°3-27	0.4	1515	840	508	1280	182	882	-	560	500	500	285	625	307	30	260	225	270	220	230	270	20	32	4-25	8-18	8-25	150	125	Y180M-4
	0.6	1555	840	508	1280	182	882	-	560	500	500	285	625	307	30	260	225	270	220	230	270	20	32	4-25	8-18	8-25	150	125	Y180L-4
	0.8	1620	840	508	1320	182	907	-	560	500	500	310	625	307	30	260	225	270	220	230	270	20	32	4-25	8-18	8-25	150	125	Y200L-4
	1.0	1690	840	508	1375	182	956	-	600	540	540	345	645	325	30	260	225	270	220	230	270	20	32	4-25	8-18	8-25	150	125	Y225M-4
	1.6	1775	840	508	1445	186	995	-	660	600	500	385	675	350	30	260	225	270	220	230	270	20	32	4-25	8-18	8-25	150	125	Y250M-4
	2.5	1845	840	508	1520	189	1026	-	720	660	520	410	740	380	30	260	225	270	220	230	270	20	32	4-25	8-18	8-25	150	125	Y280S-4
3GS 100°2-46	0.4	1790	1010	580	1470	260	980	980	610	550	550	310	705	330	30	295	265	285	240	300	300	20	26	4-27	12-15.5	12-18	200	175	Y200L-4
	0.6	1860	1010	580	1530	262	1028	514	610	550	550	345	725	350	30	295	265	285	240	300	300	20	26	6-27	12-15.5	12-18	200	175	Y225M-4
	0.8	1945	1010	580	1596	262	1066	533	660	600	600	385	725	350	30	295	265	285	240	300	300	20	26	6-27	12-15.5	12-18	200	175	Y225M-4
	1.0	2015	1010	580	1665	265	1098	549	710	650	650	410	755	380	30	295	265	285	240	300	300	20	26	6-27	12-15.5	12-18	200	175	Y280S-4
	1.6	2215	1010	580	1775	260	1172	586	790	730	530	530	860	415	30	295	265	285	240	300	300	20	26	6-27	12-15.5	12-18	200	175	Y315S-4
3GS 110°4-27	2.5	2307	1164	692	1807	308	1236	618	705	515	625	-	755	415	35	290	255	300	250	280	280	25	30	6-26	8-18	8-25	175	150	BJO ₂ -93-4
	4.0	2448	1164	692	2170	322	1452	726	930	515	850	-	1060	510	35	290	255	300	250	280	280	25	30	6-26	8-18	8-25	175	150	JS116-4
3GS 160°2-27	0.4	2010	1075	618	1715	340	1106	553	760	670	670	-	775	450	40	370	335	335	295	320	-	24	26	6-27	12-18	12-23	250	200	Y250M-4
	0.6	2080	1075	618	1781	340	1138	569	750	660	660	-	810	450	40	370	335	335	295	320	-	24	26	6-27	12-18	12-23	250	200	Y280S-4
	0.8	2280	1075	618	1893	340	1213	606	830	740	740	-	895	450	40	370	355	335	295	320	-	24	26	6-27	12-18	12-23	250	200	Y315S-4
	1.0	2330	1075	618	1942	340	1238	619	830	740	740	-	895	450	40														Y315M2-4
	1.6	-	1075	618	2120	340	1361	680	960	670	870	-	-	550	-	370	335	335	295	320	-	24	25	6-27	12-18	12-23	250	200	BJO ₂ -93-4



安装尺寸图 Drawing of mounting dimensions

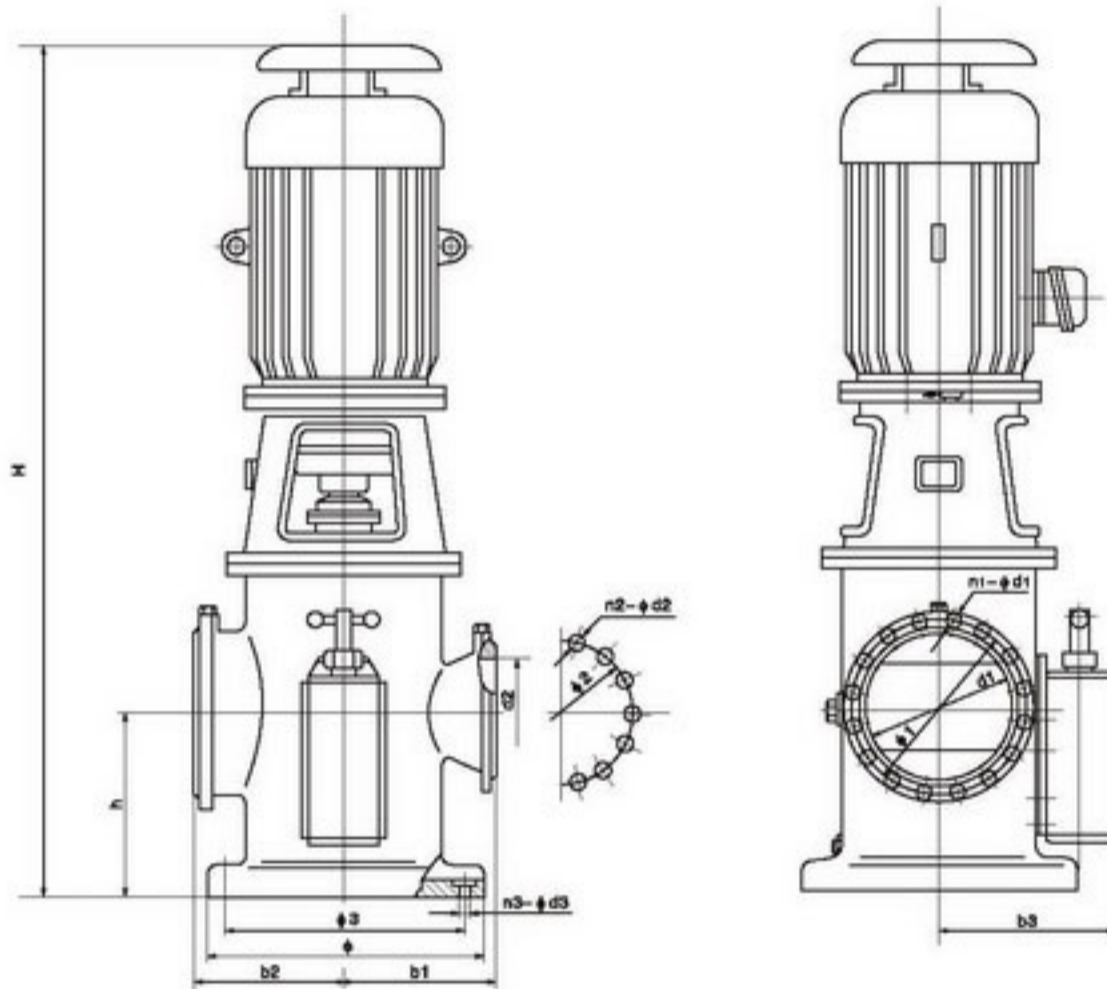

安装尺寸表 Table of mounting dimensions

泵型号 Model	压力 MPa	尺寸 Dimensions											进口 Inlet	出口 Outlet	电动机 型号 Motor	
		H	h	b ₁	b ₂	b ₃	Φ ₁	Φ ₂	Φ ₃	Φ	n ₁ -Φd ₁	n ₂ -Φd ₂				n ₃ -Φd ₃
3GSL100*2-46	0.5	1850	380	330	330	413	264	238	580	650	12-15	12-15	8-25	200	175	YB225M-4-H
	0.8	2100	450	350	350	435	264	175	700	800	12-15	12-15	8-34	200	175	YB250M-4-H
	1.0	2300	450	350	350	435	264	175	700	800	12-15	12-15	8-34	200	175	YB280S-4-H
3GSL140*2-27	0.4	1882	380	350	350	445	330	290	700	800	12-18	12-18	8-34	250	200	YB225M-4-H
	0.6	2115	380	350	350	445	330	290	700	800	12-18	12-18	8-34	250	200	YB250M-4-H
	0.8	2165	380	350	350	445	330	290	700	800	12-18	12-18	8-34	250	200	YB280S-4-H
3GSL200*2-27	0.4	2300	500	410	410	485	486	386	660 X 660	750 X 750	16-22	14-22	12-34	400	300	JO ₂ H-92-6(L ₂)